

03/08/00  
Jc5784 U.S. PTO

03-10-00

A

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

**CERTIFICATE OF EXPRESS MAILING**

This transmittal and the documents and/or fees itemized hereon and attached hereto have been deposited as "Express Mail Post Office to Addressee" in accordance with 37 CFR §1.10 with Express Mailing Label Number **EL357581120US**.

Attorney Docket No. ANDIP510

First Named Inventor:

LIONGOSARI, Edy S.

Jc572 U.S. PTO  
09/520578  
03/08/00

**UTILITY PATENT APPLICATION TRANSMITTAL (37 CFR § 1.53(b))**

Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

☐ Duplicate for  
fee processing

Sir: This is a request for filing a patent application under 37 CFR § 1.53(b) in the name of inventor:  
**Edy S. Liongosari**

For: **SYSTEM, METHOD AND ARTICLE OF MANUFACTURE FOR A KNOWLEDGEBASE  
FRAMEWORK**

Application Elements:

- ☒ 81 Pages of Specification, Claims and Abstract  
☒ 29 Sheets of Drawings  
☐ \*\* Pages Combined Declaration and Power of Attorney

Accompanying Application Parts:

- ☐ Assignment and Assignment Recordation Cover Sheet (recording fee of \$40.00 enclosed)  
☐ 37 CFR 3.73(b) Statement by Assignee  
☐ Information Disclosure Statement with Form PTO-1449  
☐ Copies of IDS Citations  
  
☐ Preliminary Amendment  
☒ Return Receipt Postcard  
☐ Small Entity Statement(s)  
☒ Other: **NO FEES ENCLOSED**

☒ The Commissioner is authorized to charge any required fees, or to credit any overpayment, to Deposit Account No. 50-0797 (Order No. AND1P510).

General Authorization for Petition for Extension of Time (37 CFR § 1.136)

☒ Applicants hereby make and generally authorize any Petitions for Extensions of Time as may be needed for any subsequent filings. The Commissioner is also authorized to charge any extension fees under 37 CFR § 1.17 as may be needed to Deposit Account No. 50-0797 (Order No. AND1P510).

☒ Please send correspondence to the following address:

HICKMAN STEPHENS COLEMAN & HUGHES, LLP  
P.O. Box 52037  
Palo Alto, CA 94303-0746

Tel (408) 558-9950  
Fax (408) 558-9960



Customer Number::

Date: March 8, 2000

A handwritten signature in black ink, appearing to read "L. Keith Stephens".

**L. Keith Stephens**  
Registration No. 32,632

00000000000000000000000000000000

CORRESPONDENCE INFORMATION

APPLICATION INFORMATION

## REPRESENTATIVE INFORMATION

```
Representative Customer Number:: 23053
Source:: PrintEFS Version 1.0.1
```

# SYSTEM, METHOD, AND ARTICLE OF MANUFACTURE FOR A KNOWLEDGEBASE FRAMEWORK

Jc572 U.S. PTO  
09/520578  
03/08/00

## FIELD OF THE INVENTION

The present invention relates to information management and retrieval and more particularly to frameworks for obtaining, managing, and providing information from a plurality of information sources.

## BACKGROUND OF THE INVENTION

People who use computer systems and networks often need to look up information about the system they are using. Traditionally, information was stored in books and manuals, which were often kept physically near to the computer. If a user needed to look up information, he turned to a single source--the paper manuals stored conveniently nearby.

Currently, however, the amount of technical information available about a given computer system can be very large and can be stored at a wide variety of sources. Information is often provided to customers in "online" form, dispensing entirely with paper copies. This online information includes online databases, CD ROM databases, proprietary help systems, and online manuals. Large amounts of technical information are also available from third party online sources and from sources such as the World Wide Web.

Amid an apparent wealth of online information, people still have problems finding the information they need. Online information retrieval may have problems including those related to inappropriate user interface designs and to poor or inappropriate organization and structure of the information. Storage of information

online in a variety of forms leads to certain information retrieval problems, several of which are described below.

- The existence of a variety of information sources leads to the lack of a unified information space. An "information space" is the set of all sources of information that is available to a user at a given time or setting. When information is stored in many formats and at many sources, a user is forced to spend too much "overhead" on discovering and remembering where different information is located (e.g., online technical books, manual pages ("manpages"), release notes, help information, etc.).
- The user also spends a large amount of time remembering how to find information in each delivery mechanism. Thus, it is difficult for the user to remember where potentially relevant information might be, and the user is forced to jump between multiple different online tools to find it.
- The existence of a variety of information sources leads to information strategies that lack cohesion. Users currently must learn to use and remember a variety of metaphors, user interfaces, and searching techniques for each delivery mechanism and class of information. No one type of interface suits all users. Furthermore, a user may need different types of searching techniques and interfaces, depending on the circumstances and the nature of the specific information needed.

- The existence of a variety of information sources leads to lack of links between sources of information. Conventional delivery mechanisms often support only loosely structured navigation, such as keyword search or hyperlinks. Such mechanisms provide the user with only a local organization of information instead of providing a global picture of the information space.

- The existence of a variety of information sources leads to frustration if the information uses a wide variety of terms or uses terms not familiar to the user. In addition, users employ concepts and terms differently than technical writers and authors. Conventional delivery mechanisms often rely on a keyword search as a

00520578-030800

5

10

15

## SUMMARY OF THE INVENTION

A system, method and article of manufacture are provided for a knowledgebase framework. Information is obtained from at least one source utilizing a network.

- 5 Utilizing a knowledge model, an index is generated for the obtained information. The generated index includes a plurality of items each associated with at least some of the obtained information. Utilizing the network, the generated index is displayed to a user. The user is permitted to select an least one of the items of the index. The information associated with the selected item is then displayed to the user utilizing
- 10 the network.

- In an aspect of the present invention, one of the sources from which information is obtained may be an internal source. In another aspect of the present invention, one of the sources from which information is obtained may be an external source
- 15 accessible utilizing a wide area network. In a further aspect of the present invention, the information obtained from the sources may include pharmaceutical information. In yet a further aspect of the present invention, displaying of the information associated with the selected item (or entry) to the user may also include utilizing the network to retrieve the associated information from the source from which the
- 20 associated information was obtained. In even another aspect of the present invention, the network may be capable of communicating using TCP/IP protocol.

- In an embodiment of the present invention, the network may be utilized to monitor one or more of the sources for updated information relating to one or more items in the index. In such an embodiment, when updated information is detected at one of
- 25 the knowledge sources, a notice may be generated regarding the updated information. This notice may then be transmitted to the user utilizing the network to notify the user of the updated information. As an option, the user may be allowed to select the source(s) to be monitored for updates or other changes.

In another embodiment of the present invention, the user may be permitted to input a search term utilizing the network. The index may be searched for items associated with the search term. Items of the index associated with the search term may then be displayed to the user utilizing the network.



## BRIEF DESCRIPTION OF THE DRAWINGS

The invention will be better understood when consideration is given to the following detailed description thereof. Such description makes reference to the annexed drawings wherein:

Figure 1 is a schematic diagram of a hardware implementation of one embodiment of the present invention;

Figure 2 is a schematic diagram of a knowledgebase framework in accordance with an embodiment of the present invention;

Figure 3 is a schematic diagram of the knowledgebase framework illustrating how the index may be used as a user's primary gateway to a wide variety of information sources in accordance with an embodiment of the present invention;

Figure 4 is a schematic diagram of an illustrative knowledge model in accordance with an embodiment of the present invention;

Figure 5 illustrates a flowchart for a process for a knowledgebase framework in accordance with an embodiment of the present invention;

Figure 6 illustrates a flowchart for a process for a knowledge model in accordance with an embodiment of the present invention;

Figure 7 is a schematic illustration of a log in frame for permitting a user to log into the knowledgebase framework utilizing a network in accordance with an embodiment of the present invention;

Figure 8 is a schematic illustration of a search and browse frame of the decision support application for permitting a user browse the knowledge model-based index in accordance with an embodiment of the present invention;

5 Figure 9 is a schematic illustration of the items of the knowledge model-base index displayed in the search and browse frame upon selection of the cardiology/vascular diseases item in Figure 8 in accordance with an embodiment of the present invention;

10 Figure 10 is a schematic illustration of the items of the knowledge model-base index displayed in the search and browse frame upon selection of the ACE biological target item in Figure 9 in accordance with an embodiment of the present invention;

15 Figure 11 is a schematic illustration of illustrative items of the knowledge model-base index displayed in the search and browse frame upon selection of the captopril compound item in accordance with an embodiment of the present invention;

20 Figure 12 is a schematic illustration of a browser frame which displays information from knowledge source relating to an item upon selection of the visit source selection in accordance with an embodiment of the present invention;

25 Figure 13 is a schematic illustration of an exemplary display of the display bar upon selection of a scientist/person item in accordance with an embodiment of the present invention;

Figure 14 is a schematic illustration of illustrative items of the knowledge model-base index displayed in the search and browse frame upon selection of a patent item in accordance with an embodiment of the present invention;

30 Figure 15 is a schematic illustration of a browser frame which displays information from knowledge source relating to the selected patent item of Figure 14 upon

selection of the visit source selection in accordance with an embodiment of the present invention;

Figure 16 illustrates a recent news frame that the user may access after logging on to the network in accordance with an embodiment of the present invention;

Figure 17 illustrates a flowchart for a process for monitoring information in a knowledgebase framework in accordance with an embodiment of the present invention;

10

Figure 18A is a schematic illustration of a process map displayed in a research frame for use in a knowledgebase framework in accordance with an embodiment of the present invention;

15

Figure 18B is a schematic illustration of an illustrative template for a process map displayed in the research frame in accordance with an embodiment of the present invention;

20

Figure 18C illustrates an inbox for managing email messages displayed in an organizer frame for use in a knowledgebase framework in accordance with an embodiment of the present invention;

25

Figure 18D illustrates a calendar for managing events and appointments of a user displayed in an organizer frame for use in a knowledgebase framework in accordance with an embodiment of the present invention;

30

Figure 19 is a schematic diagram of an exemplary system architecture in accordance with an embodiment of the present invention;

Figure 20 is a flowchart of the system in accordance with an embodiment of the present invention;

0520578-130000

Figure 21 is a flowchart of a parsing unit of the system in accordance with an embodiment of the present invention;

- 5 Figure 22 is a flowchart for pattern matching in accordance with an embodiment of the present invention;

Figure 23 is a flowchart for a search unit in accordance with an embodiment of the present invention;

10

Figure 24 is a flowchart for overall system processing in accordance with an embodiment of the present invention;

15

Figure 25 is a flowchart of topic processing in accordance with an embodiment of the present invention;

Figure 26 is a flowchart of meeting record processing in accordance with an embodiment of the present invention;

20

00000-82502560

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Embodiments of the present invention show how the concept of knowledge integration can be applied in the business world, especially in the pharmaceutical industry. Aspects of the present invention may be targeted for users active in the drug discovery process such as scientist and other researchers. Embodiments of the present invention may use knowledge integration technology to semantically integrate the knowledge capital located in various isolated repositories in the Internet. The information from this repositories are extracted and are classified based on various facets such as, for example drug, chemical compound, biological target, scientist, etc. As the results, embodiments of the present invention can graphically show users how the various facets of the information are related to each other.

An embodiment of a system in accordance with the present invention is preferably practiced in the context of a personal computer such as an IBM compatible personal computer, Apple Macintosh computer or UNIX based workstation. A representative hardware environment is depicted in Figure 1, which illustrates a typical hardware configuration of a workstation in accordance with a preferred embodiment having a central processing unit 110, such as a microprocessor, and a number of other units interconnected via a system bus 112. The workstation shown in Figure 1 includes a Random Access Memory (RAM) 114, Read Only Memory (ROM) 116, an I/O adapter 118 for connecting peripheral devices such as disk storage units 120 to the bus 112, a user interface adapter 122 for connecting a keyboard 124, a mouse 126, a speaker 128, a microphone 132, and/or other user interface devices such as a touch screen (not shown) to the bus 112, communication adapter 134 for connecting the workstation to a communication network (e.g., a data processing network) and a display adapter 136 for connecting the bus 112 to a display device 138. The workstation typically has resident thereon an operating system such as the Microsoft Windows NT or Windows/95 Operating System (OS), the IBM OS/2 operating system, the MAC OS, or UNIX operating system. Those skilled in the art will

appreciate that the present invention may also be implemented on platforms and operating systems other than those mentioned.

A preferred embodiment is written using JAVA, C, and the C++ language and utilizes object oriented programming methodology. Object oriented programming (OOP) has become increasingly used to develop complex applications. As OOP moves toward the mainstream of software design and development, various software solutions require adaptation to make use of the benefits of OOP. A need exists for these principles of OOP to be applied to a messaging interface of an electronic messaging system such that a set of OOP classes and objects for the messaging interface can be provided.

OOP is a process of developing computer software using objects, including the steps of analyzing the problem, designing the system, and constructing the program. An object is a software package that contains both data and a collection of related structures and procedures. Since it contains both data and a collection of structures and procedures, it can be visualized as a self-sufficient component that does not require other additional structures, procedures or data to perform its specific task. OOP, therefore, views a computer program as a collection of largely autonomous components, called objects, each of which is responsible for a specific task. This concept of packaging data, structures, and procedures together in one component or module is called encapsulation.

In general, OOP components are reusable software modules which present an interface that conforms to an object model and which are accessed at run-time through a component integration architecture. A component integration architecture is a set of architecture mechanisms which allow software modules in different process spaces to utilize each others capabilities or functions. This is generally done by assuming a common component object model on which to build the architecture. It is worthwhile to differentiate between an object and a class of objects at this point. An object is a single instance of the class of objects, which is often just called a

09520578-030800

class. A class of objects can be viewed as a blueprint, from which many objects can be formed.

OOP allows the programmer to create an object that is a part of another object. For example, the object representing a piston engine is said to have a composition-relationship with the object representing a piston. In reality, a piston engine comprises a piston, valves and many other components; the fact that a piston is an element of a piston engine can be logically and semantically represented in OOP by two objects.

OOP also allows creation of an object that “depends from” another object. If there are two objects, one representing a piston engine and the other representing a piston engine wherein the piston is made of ceramic, then the relationship between the two objects is not that of composition. A ceramic piston engine does not make up a piston engine. Rather it is merely one kind of piston engine that has one more limitation than the piston engine; its piston is made of ceramic. In this case, the object representing the ceramic piston engine is called a derived object, and it inherits all of the aspects of the object representing the piston engine and adds further limitation or detail to it. The object representing the ceramic piston engine “depends from” the object representing the piston engine. The relationship between these objects is called inheritance.

When the object or class representing the ceramic piston engine inherits all of the aspects of the objects representing the piston engine, it inherits the thermal characteristics of a standard piston defined in the piston engine class. However, the ceramic piston engine object overrides these ceramic specific thermal characteristics, which are typically different from those associated with a metal piston. It skips over the original and uses new functions related to ceramic pistons. Different kinds of piston engines have different characteristics, but may have the same underlying functions associated with it (e.g., how many pistons in the engine, ignition sequences, lubrication, etc.). To access each of these functions in any piston

engine object, a programmer would call the same functions with the same names, but each type of piston engine may have different/overriding implementations of functions behind the same name. This ability to hide different implementations of a function behind the same name is called polymorphism and it greatly simplifies

5 communication among objects.

With the concepts of composition-relationship, encapsulation, inheritance and polymorphism, an object can represent just about anything in the real world. In fact, one's logical perception of the reality is the only limit on determining the kinds of

10 things that can become objects in object-oriented software. Some typical categories are as follows:

- Objects can represent physical objects, such as automobiles in a traffic-flow simulation, electrical components in a circuit-design program, countries in an economics model, or aircraft in an air-traffic-control system.
  - 15 • Objects can represent elements of the computer-user environment such as windows, menus or graphics objects.
  - An object can represent an inventory, such as a personnel file or a table of the latitudes and longitudes of cities.
  - An object can represent user-defined data types such as time, angles, and complex numbers, or points on the plane.
- 20

With this enormous capability of an object to represent just about any logically separable matters, OOP allows the software developer to design and implement a computer program that is a model of some aspects of reality, whether that reality is a

25 physical entity, a process, a system, or a composition of matter. Since the object can represent anything, the software developer can create an object which can be used as a component in a larger software project in the future.

If 90% of a new OOP software program consists of proven, existing components

30 made from preexisting reusable objects, then only the remaining 10% of the new software project has to be written and tested from scratch. Since 90% already came



from an inventory of extensively tested reusable objects, the potential domain from which an error could originate is 10% of the program. As a result, OOP enables software developers to build objects out of other, previously built objects.

- 5 This process closely resembles complex machinery being built out of assemblies and sub-assemblies. OOP technology, therefore, makes software engineering more like hardware engineering in that software is built from existing components, which are available to the developer as objects. All this adds up to an improved quality of the software as well as an increased speed of its development.

10

Programming languages are beginning to fully support the OOP principles, such as encapsulation, inheritance, polymorphism, and composition-relationship. With the advent of the C++ language, many commercial software developers have embraced OOP. C++ is an OOP language that offers a fast, machine-executable code.

- 15 Furthermore, C++ is suitable for both commercial-application and systems-programming projects. For now, C++ appears to be the most popular choice among many OOP programmers, but there is a host of other OOP languages, such as Smalltalk, Common Lisp Object System (CLOS), and Eiffel. Additionally, OOP capabilities are being added to more traditional popular computer programming languages such as Pascal.

20

The benefits of object classes can be summarized, as follows:

- Objects and their corresponding classes break down complex programming problems into many smaller, simpler problems.
- 25 • Encapsulation enforces data abstraction through the organization of data into small, independent objects that can communicate with each other. Encapsulation protects the data in an object from accidental damage, but allows other objects to interact with that data by calling the object's member functions and structures.
- 30 • Subclassing and inheritance make it possible to extend and modify objects through deriving new kinds of objects from the standard classes available in

the system. Thus, new capabilities are created without having to start from scratch.

- Polymorphism and multiple inheritance make it possible for different programmers to mix and match characteristics of many different classes and create specialized objects that can still work with related objects in predictable ways.
- Class hierarchies and containment hierarchies provide a flexible mechanism for modeling real-world objects and the relationships among them.
- Libraries of reusable classes are useful in many situations, but they also have some limitations. For example:
  - Complexity. In a complex system, the class hierarchies for related classes can become extremely confusing, with many dozens or even hundreds of classes.
  - Flow of control. A program written with the aid of class libraries is still responsible for the flow of control (i.e., it must control the interactions among all the objects created from a particular library). The programmer has to decide which functions to call at what times for which kinds of objects.
  - Duplication of effort. Although class libraries allow programmers to use and reuse many small pieces of code, each programmer puts those pieces together in a different way. Two different programmers can use the same set of class libraries to write two programs that do exactly the same thing but whose internal structure (i.e., design) may be quite different, depending on hundreds of small decisions each programmer makes along the way. Inevitably, similar pieces of code end up doing similar things in slightly different ways and do not work as well together as they should.

Class libraries are very flexible. As programs grow more complex, more programmers are forced to reinvent basic solutions to basic problems over and over again. A relatively new extension of the class library concept is to have a framework of class libraries. This framework is more complex and consists of significant collections of collaborating classes that capture both the small scale

patterns and major mechanisms that implement the common requirements and design in a specific application domain. They were first developed to free application programmers from the chores involved in displaying menus, windows, dialog boxes, and other standard user interface elements for personal computers.

5

Frameworks also represent a change in the way programmers think about the interaction between the code they write and code written by others. In the early days of procedural programming, the programmer called libraries provided by the operating system to perform certain tasks, but basically the program executed down the page from start to finish, and the programmer was solely responsible for the flow of control. This was appropriate for printing out paychecks, calculating a mathematical table, or solving other problems with a program that executed in just one way.

10

15

The development of graphical user interfaces began to turn this procedural programming arrangement inside out. These interfaces allow the user, rather than program logic, to drive the program and decide when certain actions should be performed. Today, most personal computer software accomplishes this by means of an event loop which monitors the mouse, keyboard, and other sources of external events and calls the appropriate parts of the programmer's code according to actions that the user performs. The programmer no longer determines the order in which events occur. Instead, a program is divided into separate pieces that are called at unpredictable times and in an unpredictable order. By relinquishing control in this way to users, the developer creates a program that is much easier to use.

20

25

Nevertheless, individual pieces of the program written by the developer still call libraries provided by the operating system to accomplish certain tasks, and the programmer must still determine the flow of control within each piece after it's called by the event loop. Application code still "sits on top of" the system.

30

Even event loop programs require programmers to write a lot of code that should not need to be written separately for every application. The concept of an application

framework carries the event loop concept further. Instead of dealing with all the nuts and bolts of constructing basic menus, windows, and dialog boxes and then making these things all work together, programmers using application frameworks start with working application code and basic user interface elements in place.

- 5 Subsequently, they build from there by replacing some of the generic capabilities of the framework with the specific capabilities of the intended application.

Application frameworks reduce the total amount of code that a programmer has to write from scratch. However, because the framework is really a generic application  
10 that displays windows, supports copy and paste, and so on, the programmer can also relinquish control to a greater degree than event loop programs permit. The framework code takes care of almost all event handling and flow of control, and the programmer's code is called only when the framework needs it (e.g., to create or manipulate a proprietary data structure).

15 A programmer writing a framework program not only relinquishes control to the user (as is also true for event loop programs), but also relinquishes the detailed flow of control within the program to the framework. This approach allows the creation of more complex systems that work together in interesting ways, as opposed to  
20 isolated programs, having custom code, being created over and over again for similar problems.

Thus, as is explained above, a framework basically is a collection of cooperating classes that make up a reusable design solution for a given problem domain. It  
25 typically includes objects that provide default behavior (e.g., for menus and windows), and programmers use it by inheriting some of that default behavior and overriding other behavior so that the framework calls application code at the appropriate times.

30 There are three main differences between frameworks and class libraries:

00520578-030800

- Behavior versus protocol. Class libraries are essentially collections of behaviors that you can call when you want those individual behaviors in your program. A framework, on the other hand, provides not only behavior but also the protocol or set of rules that govern the ways in which behaviors can be combined, including rules for what a programmer is supposed to provide versus what the framework provides.
  - Call versus override. With a class library, the code the programmer instantiates objects and calls their member functions. It's possible to instantiate and call objects in the same way with a framework (i.e., to treat the framework as a class library), but to take full advantage of a framework's reusable design, a programmer typically writes code that overrides and is called by the framework. The framework manages the flow of control among its objects. Writing a program involves dividing responsibilities among the various pieces of software that are called by the framework rather than specifying how the different pieces should work together.
  - Implementation versus design. With class libraries, programmers reuse only implementations, whereas with frameworks, they reuse design. A framework embodies the way a family of related programs or pieces of software work. It represents a generic design solution that can be adapted to a variety of specific problems in a given domain. For example, a single framework can embody the way a user interface works, even though two different user interfaces created with the same framework might solve quite different interface problems.
- Thus, through the development of frameworks for solutions to various problems and programming tasks, significant reductions in the design and development effort for software can be achieved. A preferred embodiment of the invention utilizes HyperText Markup Language (HTML) to implement documents on the Internet together with a general-purpose secure communication protocol for a transport medium between the client and the Newco. HTTP or other protocols could be readily substituted for HTML without undue experimentation. Information on these

- products is available in T. Berners-Lee, D. Connolly, "RFC 1866: Hypertext Markup Language - 2.0" (Nov. 1995); and R. Fielding, H. Frystyk, T. Berners-Lee, J. Gettys and J.C. Mogul, "Hypertext Transfer Protocol -- HTTP/1.1: HTTP Working Group Internet Draft" (May 2, 1996). HTML is a simple data format used to create
- 5   hypertext documents that are portable from one platform to another. HTML documents are SGML documents with generic semantics that are appropriate for representing information from a wide range of domains. HTML has been in use by the World-Wide Web global information initiative since 1990. HTML is an application of ISO Standard 8879; 1986 Information Processing Text and Office
  - 10   Systems; Standard Generalized Markup Language (SGML).

- To date, Web development tools have been limited in their ability to create dynamic Web applications which span from client to server and interoperate with existing computing resources. Until recently, HTML has been the dominant technology used
- 15   in development of Web-based solutions. However, HTML has proven to be inadequate in the following areas:
    - Poor performance;
    - Restricted user interface capabilities;
    - Can only produce static Web pages;
    - 20   •   Lack of interoperability with existing applications and data; and
    - Inability to scale.

- Sun Microsystem's Java language solves many of the client-side problems by:
- Improving performance on the client side;
  - 25   •   Enabling the creation of dynamic, real-time Web applications; and
  - Providing the ability to create a wide variety of user interface components.

- With Java, developers can create robust User Interface (UI) components. Custom "widgets" (e.g., real-time stock tickers, animated icons, etc.) can be created, and
- 30   client-side performance is improved. Unlike HTML, Java supports the notion of client-side validation, offloading appropriate processing onto the client for improved

performance. Dynamic, real-time Web pages can be created. Using the above-mentioned custom UI components, dynamic Web pages can also be created.

Sun's Java language has emerged as an industry-recognized language for

- 5 "programming the Internet." Sun defines Java as: "a simple, object-oriented, distributed, interpreted, robust, secure, architecture-neutral, portable, high-performance, multithreaded, dynamic, buzzword-compliant, general-purpose programming language. Java supports programming for the Internet in the form of platform-independent Java applets." Java applets are small, specialized applications
- 10 that comply with Sun's Java Application Programming Interface (API) allowing developers to add "interactive content" to Web documents (e.g., simple animations, page adornments, basic games, etc.). Applets execute within a Java-compatible browser (e.g., Netscape Navigator) by copying code from the server to client. From a language standpoint, Java's core feature set is based on C++. Sun's Java literature
- 15 states that Java is basically, "C++ with extensions from Objective C for more dynamic method resolution."

Another technology that provides similar function to JAVA is provided by Microsoft and ActiveX Technologies, to give developers and Web designers

- 20 wherewithal to build dynamic content for the Internet and personal computers. ActiveX includes tools for developing animation, 3-D virtual reality, video and other multimedia content. The tools use Internet standards, work on multiple platforms, and are being supported by over 100 companies. The group's building blocks are called ActiveX Controls, small, fast components that enable developers to embed
- 25 parts of software in hypertext markup language (HTML) pages. ActiveX Controls work with a variety of programming languages including Microsoft Visual C++, Borland Delphi, Microsoft Visual Basic programming system and, in the future, Microsoft's development tool for Java, code named "Jakarta." ActiveX Technologies also includes ActiveX Server Framework, allowing developers to
- 30 create server applications. One of ordinary skill in the art readily recognizes that

00000-00000-00000

ActiveX could be substituted for JAVA without undue experimentation to practice the invention.

To improve the decision making process, it may be helpful to deliver the right information to the right person at the right time. For example, the right information may include information from all parts of the organization and from external sources, information in the context of the business process (regardless of the source or format), and relevant information about business entities and relationships (rather than keywords and documents). Delivering the right information to the right person may involve filtering of the information based on needs of the individual, and delivery of the filtered information to the individual or team. The right time may mean providing up-to-date information and information on demand. Several challenges exist today that can make it difficult to meet these requirements. For example, both internal and external information may exist in different environments, platforms, formats such as proprietary databases, project reports and e-mail messages. Additionally, the underlying information repositories due to the heterogeneous nature, will need to remain unaltered because scientists and other business process participants store their information in diverse formats and the development of new applications using the repositories will continue, often in isolation. Further, traditional techniques of integration can be very time consuming to develop and often inflexible to rapid change. For instance, an average data-warehousing project typically takes between nine and twelve months to complete and most of these projects will typically only integrate structured information. Also, external information can be even a greater challenge: there are over one billion web pages (with this number doubling every four months) and not all sites are useful or trustworthy.

With embodiments of the present invention, the right information can be delivered to the right person at the right time. With embodiments of the present invention, the information can come from internal and external sources. The information can also be cleansed, integrated and placed in the right business context and also be



customized to meet an individual's particular needs. Embodiments of the present invention also allow information to be delivered proactively (i.e., "pushed").

One aspect of the present invention to help facilitate efficient collaboration by helping to allow the sharing of information with other team members and by providing a medium to communicate a set of well understood processes.

Figure 2 is a schematic diagram of a knowledgebase framework 200 in accordance with an embodiment of the present invention. With such a knowledgebase framework, a wide variety of information sources may be extracted, cleansed and structured based on a knowledge model to create a highly customized index that can be accessed and browsed by a user.

In closer detail, information may be contained in a plurality of internal sources 202 and external sources 204. An internal source 202 of information is typically an information source that is an under the control of entity that employs the user and whose information may be proprietary to the entity. Internal sources of information may include, for example: discovery information, PD information, clinical information, regulatory information, and M&S information. An external source 204 of information is typically an information source that is not under the control of entity that employs the user. An external source may typically be accessible utilizing a wide are network such as the Internet and World Wide Web. External sources may include for example: bio-analysis information, study management information, safety data information, market report information, and Internet websites including government, public, and subscription based websites.

The knowledgebase framework may also include an index creator 206 which is connected to the internal and external sources 202, 204 by a network. The index creator 206 may also include or have access to a knowledgebase model 208. Utilizing the knowledgebase model 208, the index creator 206 may extract a wide variety information from the internal and external sources 202, 204, cleanse the

extracted information, restructure the extracted information and then reconcile the extracted information into a knowledge model -based index.

The knowledgebase framework **200** may also include an index database **210** coupled to the index creator **206** for storing the knowledge model-based index created by the index creator **206**. Users may then access the knowledge model-based index stored in the database **210** from a browser/portal **212** utilizing the network. As an option, the knowledgebase framework may also include a web server **214** or other similar type of computer for interfacing the browser/portal **212** with the database **210**.

Additionally, the knowledgebase framework may include a decision support application **216** for helping a user determine what is the right information for the user and help the user receive the right information at the right time for the user.

The decision support application **216** (in combination with the browser/portal **212**) provides the user with the capability to browse and navigate through an integrated web of knowledge regardless the location of the knowledge sources.

The decision support application **216** also allows the user to access internal and external information. The decision support application **216** may also be used to provide a user with information tailored for a specific process such as, for example, a drug discovery. The decision support application **216** may further be used to help deliver the right information to the user by allowing them to monitor internal and external events at a wide range of granularity.

Figure **3** is a schematic diagram of the knowledgebase framework illustrating how the index may be used as a user's primary gateway to a wide variety of information sources **202**, **204** in accordance with an embodiment of the present invention. From this index and with the assistance of the decision support application **216**, a user has the ability to retrieve the original information source. Some illustrative information sources may include a genomics database **300**, a pre-clinical database **302**, a clinical database **304**, a departmental reports database **306**, a subscription based information database **308**, and/or market report database **310**. Some of these information sources

may comprises exclusively internal or external sources while other information sources may comprise a combination of internal and external sources. In an illustrative example, as shown in Figure 3, the departmental reports database 306 may exclusively comprise internal information sources, while the subscription based information database 308, and market report database 310 may comprise exclusively external information sources. Continuing with this illustrative example, the genomics database 300, the pre-clinical database 302, and the clinical database 304 may all comprise a combination of internal and external information sources.

Figure 4 is a schematic diagram of an illustrative knowledge model 208 in

accordance with an embodiment of the present invention. The knowledge model comprises a plurality of inter-related items. In an illustrative embodiment of the present invention, as illustrated in Figure 4, the items of the knowledge model may include: a therapeutic area item 400, a target item 402, disease item 404, a scientist item 406, an organization item 408, a patent item 410, a compound item 412, a literature item 414, a FDA approval item 416, and a drug item 418.

The inter-relations between the various items of the knowledge model are illustrated in Figure 4 by the plurality of connecting lines (e.g., connecting line 420) connecting each of the items to various other items. For example, the literature item 414 is directly related with the target item 402, the scientist item 406, the organization item 408, the compound item 412, and drug item 418. Also shown in Figure 4 are the manner or type of relationship 422 provided by the associated connecting line. For example, the relationship between the literature item and the scientist item is the term "Authored."

The knowledge model also helps to provide an organizational structure to the index generated in the knowledgebase framework so that the items of the generated index are arranged according to the organization structure. In one embodiment of the present invention, the organizational structure of the generated index may be based on the inter-relations between the items of the knowledge model.

Figure 5 illustrates a flowchart for a process 500 for a knowledgebase framework in accordance with an embodiment of the present invention. Information is obtained from at least one knowledge source utilizing a network in operation 502. Utilizing a knowledge model, an index is generated for the obtained information in operation 504. This generated index includes a plurality of items (or entries) each associated with at least some of the obtained information. The generated index may then be stored in an index database. Utilizing the network, the generated index is displayed to a user in operation 506. The user is permitted to select an least one of the items of the index in operation 508. After receipt of the selection by the user, the information associated with the selected item is then displayed to the user utilizing the network in operation 510.

In an aspect of the present invention, one of the knowledge sources from which information is obtained may be an internal source under the control of entity that employs the user and whose information therein may be proprietary to the entity. Some illustrative examples of internal sources include: a genomics database, a pre-clinical database, a clinical database, and/or a departmental reports database.

In another aspect of the present invention, one of the knowledge sources from which information is obtained may be an external source (e.g., a website) accessible utilizing a wide area network such as the Internet and World Wide Web. In general, the external sources may not typically be under the control of entity that employs the user. Some illustrative examples of external sources include subscription based information, and/or market reports.

In a further aspect of the present invention, the information obtained from the sources may include pharmaceutical information such as, for example, information relating to: a pharmaceutical therapeutic area, a pharmaceutical target, a pharmaceutical compound, a disease, a patent, the Federal Drug Administration (FDA) (such as information regarding FDA approval of a pharmaceutical), a person

researching or working on a pharmaceutical, and/or pharmaceutical literature such as a periodical.

5 In an embodiment of the present invention, the network may be utilized to monitor one or more of the knowledge sources for updated information relating to one or more items in the index. In such an embodiment, when updated information is detected at one of the knowledge sources, a notice may be generated regarding the updated information. This notice may then be transmitted to the user utilizing the network to notify the user of the updated information. As an option, the user may be  
10 allowed to select the knowledge source(s) to be monitored for updates or other changes.

15 In another embodiment of the present invention, the user may be permitted to input a search term for searching the index utilizing the network. Upon receipt of the search term, the index may be searched for items associated with the search term. Items of the index associated with the input search term (i.e., that match the search term) may then be displayed to the user utilizing the network.

20 In one aspect of the present invention, the items of the index may be organized and displayed in some sort of a hierarchical format such as, for example, a hierarchical tree format. In yet a further aspect of the present invention, displaying of the information associated with the selected item (or entry) to the user may also include utilizing the network to retrieve the associated information from the knowledgebase source (such as a website) from which the associated information was obtained. In  
25 even another aspect of the present invention, the network may be capable of communicating using TCP/IP protocol.

Figure 6 illustrates a flowchart for a process 600 for a knowledge model in accordance with an embodiment of the present invention. A network is utilized to  
30 access or one or more knowledge sources in operation 602. Information from the knowledge source is then extracted utilizing the network in operation 604. The

00520578.030200

extracted information may have its own formatting. The format of the extracted information is converted in operation 606 into a common or standardized format (i.e., cleansing and restructuring). An index is generated for the standardized extracted information utilizing a knowledge model in operation 608. The generated index is then stored in an index database in operation 610.

In one aspect of the present invention, the knowledge model may include a plurality of inter-associated or inter-related items. In such an aspect, generation of the index may include associating the extracted information with one or more of the items of the model, and then mapping the extracted information to the associated item. In this manner, when the index is displayed to a user, selection of the item by a user links the user to the associated information and the source of the information. As an option, the items of the knowledge model may include a therapeutic area item, a target item, disease item, a scientist item, an organization item, a patent item, a compound item, a literature item, a FDA approval item, and/or a drug item.

In even another aspect of the present invention, the knowledge model may also provide an organizational structure to the generated index so that the items of the generated index are arranged according to the organization structure. As an illustrative example, the organizational structure may be a hierarchical tree of the items. In a further aspect of the present invention, the extracted information may include pharmaceutical information. In another aspect of the present invention, the knowledge sources may include one or more an internal knowledge sources, and/or an external knowledge sources. In yet still another aspect of the present invention, the network may be capable of communicating using TCP/IP protocol.

In an embodiment of the present invention, a user may be permitted to access the database utilizing the network to retrieve the stored index. In another embodiment of the present invention, a query may be received utilizing the network whereupon, the index may be searched for information matching the query to thereby permit retrieval of the matching information utilizing the network.

In one embodiment of the present invention, the knowledgebase framework **200** may be used to help a user learn about a field and/or catch up on new developments in this field. In an embodiment of the present invention, a user may be able to use the knowledgebase framework **200** to find people who are involved in the area being studied and their background, previous research work done in the area (which in an illustrative embodiment may include a list of targets, compounds and drugs), and obtain research reports relating to the area being studied. Also, the user may utilize the knowledgebase framework **200** to find information from external sources such as, for example: recent patents, targets, compounds, and drugs relating to the area being studied, as well as the people (such as scientists) who are actively working in this field or area of study.

Figure **7** is a schematic illustration of a log in frame **700** for permitting a user to log into the knowledgebase framework utilizing a network in accordance with an embodiment of the present invention. In one aspect of the present invention, the log in frame **700** may include a user name field **702** for permitting a user to enter a user name associated therewith, a password field **704** for permitting the user to enter a password associated with the user and the user name, and a selectable log in button **706** for permitting the user to log into the knowledgebase framework upon selection thereof.

Upon logging in, the user has access to the knowledgebase framework utilizing the decision support application **216** to obtain information in the area of their study. Figure **8** is a schematic illustration of a search and browse frame **800** of the decision support application for permitting a user browse the knowledge model-based index in accordance with an embodiment of the present invention. Displayed in the search and browse frame **800** is a portion of the items of an illustrative knowledge model-based index. In this illustrative example, the items of the index being displayed comprises the therapeutic area items **802** of the illustrative index including, for example, a cardiology/vascular diseases **804** therapeutic area item. The items of the

index displayed in the search and browse frame **800** also comprise selectable links which upon selection thereof by the user leads to the retrieval from the index database **210** and the displaying in the search and browse frame **800** of items of the knowledge model-based index related to the selection item.

5

Figure **9** is a schematic illustration of the items of the knowledge model-base index displayed in the search and browse frame **800** upon selection of the cardiology/vascular diseases item **804** in Figure **8** in accordance with an embodiment of the present invention. These items also comprise selectable links so that selection of one of them leads to the retrieving and display of other items of the index related to the selected item. Included in Figure **9**, are disease items **900** and biological target items **902** of the illustrative index related to the selected therapeutic target item **804**. In an illustrative example, one of the biological target items of the index being displayed in Figure **9** may include an ACE biological target item **904**.

15

Figure **10** is a schematic illustration of the items of the knowledge model-base index displayed in the search and browse frame **800** upon selection of the ACE biological target item **904** in Figure **9** in accordance with an embodiment of the present invention. These items also comprise selectable links so that selection of one of them leads to the retrieving and display of other items of the index related to the selected item. Included in Figure **10**, are component items **1002** of the illustrative index related to the selected item. In an illustrative example, one of the compound items of the index being displayed in Figure **10** may include a captopril compound item **1004**.

25

As illustrated in Figure **10**, in one aspect of the present invention, the search and browse frame **800** may include a display bar **1006** in which the hierarchy **1008** in the index of the selected item may be displayed. For example, in Figure **10**, the displayed hierarchy **1008** may comprises the target name ACE, and the therapeutic area cardiology/vascular.

30

09520578.030000



Figure 11 is a schematic illustration of illustrative items of the knowledge model-base index displayed in the search and browse frame 800 upon selection of the captopril compound item 1004 in accordance with an embodiment of the present invention. These items also comprise selectable links so that selection of one of them leads to the retrieving of information from the knowledgebase framework 200 and/or other items of the index related to the selected item. Included in Figure 11, are illustrative items of the illustrative index related to the selected item (in this case captopril). In this illustrative example, the displayed related items include: related drug items 1100, related patent items 1102, related scientists and/or people items 1104, related literature items 1106, and related disease items 1108.

In one embodiment of the present invention, one of the items may be selected (such as by clicking the right button of a mouse when the mouse pointer is over the item, i.e., "right clicking") to display a pop-up menu 1110 which includes a monitor selection 1112 and a visit source selection 1114.

Figure 12 is a schematic illustration of a browser frame 1200 which displays information 1202 from knowledge source relating to an item (in this example the captopril drug item 1004) upon selection of the visit source selection 1114 of Figure 11 in accordance with an embodiment of the present invention. In the illustrative example illustrated in Figure 12, the information 1202 displayed in the browser frame 1200 relates to the drug captopril and is obtained from an external source, in this case an illustrative website 1204 on the Internet

Figure 13 is a schematic illustration of an exemplary display of the display bar 1006 upon selection of a scientist/person item 1104 in accordance with an embodiment of the present invention. When a user selects a scientist/person item 1104, the knowledgebase framework may retrieve contact information for the scientist/person from a knowledge source and then display the retrieved contact information 1300 in the display bar 1006.

Figure 14 is a schematic illustration of illustrative items of the knowledge model-base index displayed in the search and browse frame 800 upon selection of the patent item 1116 of Figure 11 in accordance with an embodiment of the present invention. In an illustrative embodiment, the displayed items related to the selected patent item 1116 may include items for patent cited 1400 in the selected patent 1116, items for organizations 1402 related to the selected patent, items for FDA approval matters 1404 related to the selected patent, items for scientists and/or people 1406 associated with the selected patent, and items for compounds 1004 related to the selected patent.

Figure 15 is a schematic illustration of a browser frame 1500 which displays information 1502 from knowledge source relating to the selected patent item of Figure 14 upon selection of the visit source selection 1114 of Figure 14 in accordance with an embodiment of the present invention. In the illustrative example illustrated in Figure 15, the information 1502 displayed in the browser frame 1500 relates to US Patent 5,238,924 and is obtained from an external source, in this case, the USPTO website's Patent Full Text and Image Database.

Utilizing the knowledgebase framework, a user may be able to monitor work done by others, such as scientists researching a particular area or field. This may be accomplished by selecting the monitor selection 1110 of a selected item, such as for example a scientist item 1118 displayed the search and browse frame of Figure 11. In an embodiment of the present invention, any of the items of the index can be monitored for changes and updates to related information. For example, a user can select for monitoring an organization for any new publications, patents, drug applications, and recent news associated with the organization. In another illustrative example, a target item may be monitored for any new information related to monitored target.

In one embodiment of the present invention, when the user logs into the decision support application 216, the user may see the most recent news about the scientists. Figure 16 illustrates a recent news frame 1600 that the user may access after logging

on to the network in accordance with an embodiment of the present invention. In one aspect of the present invention, a portion of the recent news frame **1600** may comprise a recent news portion **1602** and a monitored items portion **1604**. In such an aspect, links **1606**, **1608** to recently updated information may be displayed. In an illustrative example, selection of link **1606** (which is a link to a patent) may result in the retrieval and displaying of a browser frame similar to the browser frame of Figure **15** to display information relating to the selected patent obtained from the USPTO website's Patent Full Text and Image Database.

With continuing reference to Figure **16**, the links may also comprise hypertext links and include textual summaries relating to information that was recently updated (see e.g., link **1608**). As an option, these links may be organized by subjects or items such as for example, the items of the knowledge model **208** and displayed in corresponding subheadings. As illustrated in Figure **16**, some illustrative subheadings may include an organizations subheading **1610**, a targets subheading **1612**, and a scientist subheading **1614**.

The monitored items portion **1604** may display a list of items **1616** selected by the user to be monitored by the knowledgebase framework. Like the recent news links **1606**, the items **1616** in the monitored items portion **1604** may comprise links to access items in the knowledge model-based index.

With continuing reference to Figure **16**, a search bar **1618** may also be displayed to the user. The search bar **1618** may include at least one field **1620** for the user to input a search term. Upon input, a search may be conducted by a search engine for items in the index related to the inputted term(s). Figure A Figure **17** illustrates a flowchart for a process **1700** for monitoring information in a knowledgebase framework in accordance with an embodiment of the present invention. Utilizing a network, information is received from a user that relates to a target to be tracked in operation **1702**. The network is monitored for changes or updates to the target **1704**. When a change is monitored, data relating to the

monitored changes is retrieved in operation **1706** and then transmitted to the user utilizing the network in operation **1708**.

- In one aspect of the present invention, the target may be an item of index displayed to the user utilizing the network. In another aspect of the present invention, the target may be: a publication (e.g., literature), a person (e.g., scientist), a therapeutic area, a disease, a biological target, an organization, a compound, a patent, FDA approval, and/or a drug.
- In a further aspect of the present invention, a pharmaceutical database may be monitored for changes or updates relating to the target. In yet another aspect of the present invention, the network may comprise an intranet of an organization and the Internet.
- In an embodiment of the present invention, the received information may be stored in memory. In another embodiment of the present invention, the retrieved data may be transmitted to the user after receipt of an indication that the user has logged on to the network. As an option to such an embodiment, the retrieved data may be automatically transmitted to the user after receipt of the indication that the user has logged on to the network.
- In a further embodiment of the present invention, the user may be alerted that a change or update to the target has been monitored utilizing the network. In even another embodiment of the present invention, the user may be permitted to input a search term utilizing the network. In such an embodiment, items associated with the search term may be searched for upon receipt of the search term. Then those items which have been found to be associated with the inputted search term may be displayed to the user utilizing the network.
- Figure **18A** is a schematic illustration of a process map **1800** displayed in a research frame **1802** for use in a knowledgebase framework in accordance with an

09520578.030800

embodiment of the present invention. With the research frame **1802**, a user may be able to share a set of common processes and report templates with one or more other users to document their findings for further collaboration. The process map graphically depicts a timeline for one or more processes. In the illustrative example illustrated in Figure **18A**, the depicted process map **1800** may be for process for the development of a product **1804** in a pharmaceutical setting.

The research frame **1802** may also include selectable links for accessing various tools for the research frame such as for example, templates **1806** and target tracking tools **1808**. Figure **18B** is a schematic illustration of an illustrative template **1810** for a process map displayed in the research frame **1802** in accordance with an embodiment of the present invention.

Figure **18C** illustrates an inbox **1812** for managing email messages displayed in an organizer frame **1814** for use in a knowledgebase framework in accordance with an embodiment of the present invention. The organizer frame may also include a plurality of tool links for accessing features of the organizer frame. Illustrative examples of tool links include a mail link **1816** for displaying the inbox upon selection thereof and a calendar link **1818**. Also illustrated in Figure **18C** is a pull-down menu **1820** that may be included in the search bar **1618** to further narrow a search of terms input into the search bar.

Figure **18D** illustrates a calendar **1822** for managing events and appointments of a user displayed in an organizer frame **1814** for use in a knowledgebase framework in accordance with an embodiment of the present invention. The calendar **1822** may be displayed upon selection of the calendar link **1818** by a user.

The following example describes an illustrative scenario for utilizing the knowledgebase framework in accordance with an embodiment of the present invention.

## EXAMPLE

0520578-00000  
00000-0250260

Anne Kline, a senior biologist at Acme Pharmaceutical, has just transferred from the Oncology department to the Cardiovascular department. She has a reasonably strong background in Cardiovascular. Prior to joining Acme Pharmaceutical, she worked at the Imperial College School of Medicine's Cardiovascular department for a couple years. However, she has not been active in this area since she joined Acme Pharmaceutical 3 years ago. She needs to catch up with the new developments in this area -- inside and outside Acme Pharmaceutical. Acme Pharmaceutical has just installed a knowledgebase framework. The knowledgebase framework allows Acme Pharmaceutical's scientists to search, browse and monitor internal and external information available to them. Anne accesses the knowledgebase framework from her computer desktop.

Anne accesses the knowledgebase framework from her computer desktop. She spends almost the entire day using the knowledgebase framework and at the end of the day she is able to find:

- The people in Acme Pharmaceutical who are involved in the cardiovascular area and their background
- Previous research work done within Acme Pharmaceutical (which includes a list of targets, compounds and drugs)
- Internal research reports

In addition, Anne also finds useful information from external sources such as recent:

- Patents
- Targets
- Compounds
- Drugs
- as well the scientists who are actively working in this area

In addition, Anne finds two scientists whose work seem to be relevant to her first assignment. She sets up her profile in the knowledgebase framework in such a way that it will monitor any future work done by these scientists ... The next time Anne accesses the knowledgebase framework, she will see the most recent news about those two scientists. She also knows that Merck has been very active in the Cardiovascular area. She sets up the knowledgebase framework to monitor any new publications, patents, drug applications by Merck. The next time Anne accesses the knowledgebase framework, she will see the most recent news about Merck.

Anne's first assignment is to investigate TR27 K-Channel as a potential target for hypertension treatment. She uses the knowledgebase framework to find out any previous work related TR27. She finds only one article that are somewhat relevant. Since she will be working on this target for awhile, she sets up the knowledgebase framework to monitor any new information related to TR27. One morning a couple days later, Anne turns on her computer and the knowledgebase framework informs her that Pfizer has filed a patent and this patent has cited TR27. Anne quickly browses through the patent. Luckily, the patent cited TR27 for a different reason.

Later on that day, the knowledgebase framework informs her that there is a newly released internal report that mentioned this particular target. This report was filed by the Neurology department, right after the High Throughput Screening was conducted on the target. She downloads the report and studies it carefully.

She launches Target DB, a tool that stores information of all targets investigated by Acme Pharmaceutical, from the knowledgebase framework to find out the details information about assay used for TR27. With help from the knowledgebase framework, Anne figures out the person involved with this target. She is able to contact one of that researcher for further information.

While her testing procedures will be different, Anne is able to use many parts of the results as a starting point. This encounter has saved her a few months of hard work. The two researchers are able to share a set of common processes and report templates to document their findings for further collaboration.

Figure 19 is a schematic diagram of an exemplary system architecture in accordance with an embodiment of the present invention.

In accordance with an embodiment of the present invention, a BackgroundFinder (BF) is implemented as an agent responsible for preparing an individual for an upcoming meeting by helping him/her retrieve relevant information about the meeting from various sources. BF receives input text in character form indicative of the target meeting. The input text is generated in accordance with an embodiment of the present invention by a calendar program that includes the time of the meeting. As the time of the meeting approaches, the calendar program is queried to obtain the text of the target event and that information is utilized as input to the agent. Then, the agent parses the input meeting text to extract its various components such as title, body, participants, location, time etc. The system also performs pattern matching to identify particular meeting fields in a meeting text. This information is utilized to query various sources of information on the web and obtain relevant stories about the current meeting to send back to the calendaring system. For example, if an individual has a meeting with Netscape and Microsoft to talk about their disputes, and would obtain this initial information from the calendaring system. It will then parse out the text to realize that the companies in the meeting are "Netscape" and "Microsoft" and the topic is "disputes." Then, the system queries the web for relevant information concerning the topic. Thus, in accordance with an objective of the invention, the system updates the calendaring system and eventually the user with the best information it can gather to prepare the user for the target meeting. In accordance with an embodiment of the present invention, the



information is stored in a file that is obtained via selection from a link imbedded in the calendar system.

#### Program Organization:

- 5 A computer program in accordance with an embodiment of the present invention is organized in five distinct modules: BF.Main, BF.Parse, Background Finder.Error, BF.PatternMatching and BF.Search. There is also a frmMain which provides a user interface used only for debugging purposes. The executable programs in accordance with an embodiment of the present invention never execute with the user interface and should only return to the calendaring system through Microsoft's Winsock control. An embodiment of the system executes in two different modes which can be specified under the command line sent to it by the calendaring system. When the system runs in simple mode, it executes a keyword query to submit to external search engines. When executed in complex mode, the system performs pattern matching before it forms a query to be sent to a search engine.
- 10
- 15

#### Data Structures:

The system in accordance with an embodiment of the present invention utilizes three user defined structures:

- 20 TMeetingRecord;  
TPatternElement; and  
TPatternRecord.

- The user-defined structure, tMeetingRecord, is used to store all the pertinent information concerning a single meeting. This info includes userID, an original description of the meeting, the extracted list of keywords from the title and body of meeting etc. It is important to note that only one meeting record is created per instance of the system in accordance with an embodiment of the present invention. This is because each time the system is spawned to service an upcoming meeting, it is assigned a task to retrieve information for only one meeting. Therefore, the meeting record created corresponds to the current meeting examined.
- 25
- 30

ParseMeetingText populates this meeting record and it is then passed around to provide information about the meeting to other functions.

If GoPatternMatch can bind any values to a particular meeting field, the corresponding entries in the meeting record is also updated. The structure of tMeetingRecord with each field described in parentheses is provided below in accordance with an embodiment of the present invention.

#### **Public Type tMeetingRecord**

	sUserID As String	(user id given by Munin)
10	sTitleOrig As String	(original non stop listed title we need to keep around to send back to Munin)
	sTitleKW As String	(stoplisted title with only keywords)
	sBodyKW As String	(stoplisted body with only keywords)
	sCompany() As String	(companies identified in title or body through pattern matching)
15	sTopic() As String	(topics identified in title or body through pattern matching)
	sPeople() As String	(people identified in title or body through pattern matching)
20	sWhen() As String	(time identified in title or body through pattern matching)
	sWhere() As String	(location identified in title or body through pattern matching)
	sLocation As String	(location as passed in by Munin)
25	sTime As String	(time as passed in by Munin)
	sParticipants() As String	(all participants engaged as passed in by Munin)
	sMeetingText As String	(the original meeting text w/o userid)

End Type

30 There are two other structures which are created to hold each individual pattern utilized in pattern matching. The record tAPatternRecord is an array containing all

09520578.030800

the components / elements of a pattern. The type tAPatternElement is an array of strings which represent an element in a pattern. Because there may be many "substitutes" for each element, we need an array of strings to keep track of what all the substitutes are. The structures of tAPatternElement and tAPatternRecord are presented below in accordance with an embodiment of the present invention.

Public Type tAPatternElement

    elementArray() As String

End Type

10 Public Type tAPatternRecord

    patternArray() As tAPatternElement

End Type

#### User Defined Constants:

15 Many constants are defined in each declaration section of the program which may need to be updated periodically as part of the process of maintaining the system in accordance with an embodiment of the present invention. The constants are accessible to allow dynamic configuration of the system to occur as updates for maintaining the code.

20

Included in the following tables are lists of constants from each module which I thought are most likely to be modified from time to time. However, there are also other constants used in the code not included in the following list. It does not mean that these non-included constants will never be changed. It means that they will change much less frequently.

25

For the Main Module (BF.Main) :

CONSTANT	PRESET VALUE	USE
MSGTOMUNIN_TYPE	6	Define the message number used to identify messages between BF and Munin

CONSTANT	PRESET VALUE	USE
IP_ADDRESS_MUNIN	"10.2.100.48"	Define the IP address of the machine in which Munin and BF are running on so they can transfer data through UDP.
PORT_MUNIN	7777	Define the remote port in which we are operating on.
TIMEOUT_AV	60	Define constants for setting time out in inet controls
TIMEOUT_NP	60	Define constants for setting time out in inet controls
CMD_SEPARATOR	"\"	Define delimiter to tell which part of Munin's command represents the beginning of our input meeting text
OUTPARAM_SEPARATOR	"::"	Define delimiter for separating out different portions of the output. The separator is for delimiting the msg type, the user id, the meeting title at the beginning of the actual stories retrieved.

For the Search Module (BF.Search):

CONSTANT	CURRENT VALUE	USE
PAST_NDAYS	5	Define number of days you want to look back for AltaVista articles. Doesn't really matter now because we aren't really doing a news search in alta vista. We want all info.
CONNECTOR_AV_URL	"AND"	Define how to connect keywords. We want all our keywords in the string

CONSTANT	CURRENT VALU	USE
		for now use AND. If you want to do an OR or something, just change connector.
CONNECTOR_NP_URL	" +AND+"	Define how to connect keywords. We want all our keywords in the string for now use AND. If you want to do an OR or something, just change connector.
NUM_NP_STORIES	3	Define the number of stories to return back to Munin from NewsPage.
NUM_AV_STORIES	3	Define the number of stories to return back to Munin from AltaVista.

For the Parse Module (BF.Parse):

CONSTANT	CURRENT VALU	USE
PORTION_SEPARATOR	"::"	Define the separator between different portions of the meeting text sent in to Munin. For example in "09::Meet with Chad::about life::Chad   Denise::::" "::" is the separator between different parts of the meeting text.
PARTICIPANT_SEPARATOR	" "	Define the separator between each participant in the participant list portion of the original meeting text. Refer to example above.

- 5 For Pattern Matching Module (BF.PatternMatch): There are no constants in this module which require frequent updates.

The best way to depict the process flow and the coordination of functions between each other is with the five flowcharts illustrated in Figures 20 to 24. Figure 20 depicts the overall process flow in accordance with an embodiment of the present invention.

- Processing commences at the top of the chart at function block **2000** which launches when the program starts. Once the application is started, the command line is parsed to remove the appropriate meeting text to initiate the target of the background find operation in accordance with an embodiment of the present invention as shown in function block **2010**. A global stop list is generated after the target is determined as shown in function block **2020**. Then, all the patterns that are utilized for matching operations are generated as illustrated in function block **2030**. Then, by tracing through the chart, function block **2000** invokes GoBF **2040** which is responsible for logical processing associated with wrapping the correct search query information for the particular target search engine. For example, function block **2040** flows to function block **2050** and it then calls GoPatternMatch as shown in function block **2060**. To see the process flow of GoPatternMatch, we swap to the diagram titled “Process Flow for BF’s Pattern Matching Unit.”

- One key thing to notice is that functions depicted at the same level of the chart are called  
by in sequential order from left to right (or top to bottom) by their common parent  
function. For example, Main **2000** calls ProcessCommandLine **1010**, then  
CreateStopList **2020**, then CreatePatterns **3030**, then GoBackgroundFinder **2040**.  
Figures **21** to **24** detail the logic for the entire program, the parsing unit, the pattern  
matching unit and the search unit respectively. Figure **24** details the logic determinative  
of data flow of key information through BackgroundFinder, and shows the functions  
that are responsible for creating or processing such information.

### DETAILED SEARCH ARCHITECTURE UNDER THE BASIC SEARCH / SIMPLE QUERY MODE

Search ALTA VISTA (Function block 2070 of Figure 20):

The Alta Vista search engine utilizes the identifies and returns general information about topics related to the current meeting as shown in function block 270 of Figure 2. The system in accordance with an embodiment of the present invention takes all the keywords from the title portion of the original meeting text and constructs an advanced query to send to Alta Vista. The keywords are logically combined together in the query. The results are also ranked based on the same set of keywords. One of ordinary skill in the art will readily comprehend that a date restriction or publisher criteria could be facilitated on the articles we want to retrieve. A set of top ranking stories are returned to the calendaring system in accordance with an embodiment of the present invention.

**NewsPage** (Function Block 2075 of Figure 20):

The NewsPage search system is responsible for giving us the latest news topics related to a target meeting. The system takes all of the keywords from the title portion of the original meeting text and constructs a query to send to the NewsPage search engine. The keywords are logically combined together in the query. Only articles published recently are retrieved. The NewsPage search system provides a date restriction criteria that is settable by a user according to the user's preference. The top ranking stories are returned to the calendaring system.

Figure 21 is a user profile data model in accordance with an embodiment of the present invention. Processing commences at function block 2100 which is responsible for invoking the program from the main module. Then, at function block 2110, a wrapper function is invoked to prepare for the keyword extraction processing in function block 2120. After the keywords are extracted, then processing flows to function block 2130 to determine if the delimiters are properly positioned. Then, at function block 2140, the number of words in a particular string is calculated and the delimiters for the particular field are and a particular field from the meeting text is retrieved at function block 2150. Then, at function block 2180,

the delimiters of the string are again checked to assure they are placed appropriately. Finally, at function block 2160, the extraction of each word from the title and body of the message is performed a word at a time utilizing the logic in function block 2162 which finds the next closest word delimiter in the input phrase, function block 2164 which strips unnecessary materials from a word and function block 2166 which determines if a word is on the stop list and returns an error if the word is on the stop list.

#### 10 Pattern Matching:

Limitations associated with a simple searching method include:

1. Because it relies on a stop list of unwanted words in order to extract from the meeting text a set of keywords, it is limited by how comprehensive the stop list is. Instead of trying to figure out what parts of the meeting text we should throw away, we should focus on what parts of the meeting text we want.
2. A simple search method in accordance with an embodiment of the present invention only uses the keywords from a meeting title to form queries to send to Alta Vista and NewsPage. This ignores an alternative source of information for the query, the body of the meeting notice. We cannot include the keywords from the meeting body to form our queries because this often results in queries which are too long and so complex that we often obtain no meaningful results.
3. There is no way for us to tell what each keyword represents. For example, we may extract "Andy" and "Grove" as two keywords. However, a simplistic search has no way knowing that "Andy Grove" is in fact a person's name. Imagine the possibilities if we could somehow intelligently guess that "Andy Grove" is a person's name. We can find out if he is an Andersen person and if so what kind of projects he's been on before etc. etc.
4. In summary, by relying solely on a stop list to parse out unnecessary words, we suffer from "information overload".

09520578.030000



### **Pattern Matching Overcomes These Limitations:**

Here's how the pattern matching system can address each of the corresponding issues above in accordance with an embodiment of the present invention.

- 5 1. By doing pattern matching, we match up only parts of the meeting text that we want and extract those parts.
2. By performing pattern matching on the meeting body and extracting only the parts from the meeting body that we want. Our meeting body will not go to complete waste then.
- 10 3. Pattern matching is based on a set of templates that we specify, allowing us to identify people names, company names etc from a meeting text.
4. In summary, with pattern matching, we no longer suffer from information overload. Of course, the big problem is how well our pattern matching works. If we rely exclusively on artificial intelligence processing, we do not
- 15 have a 100% hit rate. We are able to identify about 20% of all company names presented to us.

### **Patterns:**

- A pattern in the context of an embodiment of the present invention is a template
- 20 specifying the structure of a phrase we are looking for in a meeting text. The patterns supported by an embodiment of the present invention are selected because they are templates of phrases which have a high probability of appearing in someone's meeting text. For example, when entering a meeting in a calendar, many would write something such as "Meet with Bob Dutton from Stanford University
  - 25 next Tuesday." A common pattern would then be something like the word "with" followed by a person's name (in this example it is Bob Dutton) followed by the word "from" and ending with an organization's name (in this case, it is Stanford University).

### **Pattern Matching Terminology:**

Terminology associated with pattern matching includes:

- Pattern: a pattern is a template specifying the structure of a phrase we want to bind the meeting text to. It contains sub units.
- Element: a pattern can contain many sub-units. These subunits are called elements. For example, in the pattern “with \$PEOPLES\$ from \$COMPANY\$”, “with” “\$PEOPLES\$” “from” “\$COMPANY\$” are all elements.
- Placeholder: a placeholder is a special kind of element in which we want to bind a value to. Using the above example, “\$PEOPLES\$” is a placeholder.
- Indicator: an indicator is another kind of element which we want to find in a meeting text but no value needs to bind to it. There may be often more than one indicator we are looking for in a certain pattern. That is why an indicator is not an “atomic” type.
- Substitute: substitutes are a set of indicators which are all synonyms of each other. Finding any one of them in the input is good.

**There may be five fields which are identified for each meeting:**

- Company (\$COMPANY\$)
- People (\$PEOPLES\$)
- Location (\$LOCATION\$)
- Time (\$TIMES\$)
- Topic (\$TOPIC\_UPPER\$) or (\$TOPIC\_ALL\$)

In parentheses are the illustrative placeholders used in the code as representation of the corresponding meeting fields.

Each placeholder may have the following meaning:

- \$COMPANY\$: binds a string of capitalized words (e.g., Meet with Joe Carter of <Andersen Consulting >)
- \$PEOPLES\$: binds series of string of two capitalized words potentially connected by “,” “and” or “&” (e.g., Meet with <Joe Carter> of Andersen Consulting, Meet with <Joe Carter and Luke Hughes> of Andersen Consulting)



		presentation	presentation
	f	\$TOPIC_UPPER\$ visit	Push Technology visit
	g	\$TOPIC_UPPER\$ briefing	Push Technology briefing
	h	\$TOPIC_UPPER\$ discussion	Push Technology discussion
	i	\$TOPIC_UPPER\$ workshop	Push Technology workshop
	j	\$TOPIC_UPPER\$ prep	Push Technology prep
	k	\$TOPIC_UPPER\$ review	Push Technology review
	l	\$TOPIC_UPPER\$ lunch	Push Technology lunch
	m	\$TOPIC_UPPER\$ project	Push Technology project
	n	\$TOPIC_UPPER\$ projects	Push Technology projects
3	a	\$COMPANY\$ corporation	Intel Corporation
	b	\$COMPANY\$ corp.	IBM Corp.
	c	\$COMPANY\$ systems	Cisco Systems
	d	\$COMPANY\$ limited	IBM limited
	e	\$COMPANY\$ ltd	IBM ltd
4	a	about \$TOPIC_ALL\$	About intelligent agents technology
	b	discuss \$TOPIC_ALL\$	Discuss intelligent agents technology
	c	show \$TOPIC_ALL\$	Show the client our intelligent agents technology
	d	re: \$TOPIC_ALL\$	re: intelligent agents technology
	e	review \$TOPIC_ALL\$	Review intelligent agents technology
	f	agenda	The agenda is as follows: --clean up --clean up

09520578-03880

			--clean up
	g	agenda: \$TOPIC_ALL\$	Agenda: --demo client intelligent agents technology. --demo ecommerce.
5	a	w/\$PEOPLE\$ of \$COMPANY\$	Meet w/Joe Carter of Andersen Consulting
	b	w/\$PEOPLE\$ from \$COMPANY\$	Meet w/Joe Carter from Andersen Consulting
6	a	w/\$COMPANY\$ per \$PEOPLE\$	Talk w/Intel per Jason Foster
7	a	At \$TIMES\$	at 3:00pm
	b	Around \$TIMES\$	Around 3:00 pm
8	a	At \$LOCATION\$	At LuLu's resturant
	b	In \$LOCATION\$	in Santa Clara
9	a	Per \$PEOPLE\$	per Susan Butler
10	a	call w/\$PEOPLE\$	Conf call w/John Smith
	B	call with \$PEOPLE\$	Conf call with John Smith
11	A	prep for \$TOPIC_ALL\$	Prep for London meeting
	B	preparation for \$TOPIC_ALL\$	Preparation for London meeting

Figure 22 is a detailed flowchart of pattern matching in accordance with an embodiment of the present invention. Processing commences at function block 2200 where the main program invokes the pattern matching application and passes control to function block 2210 to commence the pattern match processing. Then, at function block 2220, the wrapper function loops through to process each pattern which includes determining if a part of the text string can be bound to a pattern as shown in function block 2230. Then, at function block 2240, various placeholders are bound to values if they exist, and in function block 2241, a list of names

separated by punctuation are bound, and at function block **2242** a full name is processed by finding two capitalized words as a full name and grabbing the next letter after a space after a word to determine if it is capitalized. Then, at function block **2243**, time is parsed out of the string in an appropriate manner and the next word after a blank space in function block **2244**. Then, at function block **2245**, the continuous phrases of capitalized words such as company, topic or location are bound and in function block **2246**, the next word after the blank is obtained for further processing in accordance with an embodiment of the present invention. Following the match meeting field processing, function block **2250** is utilized to locate an indicator which is the head of a pattern, the next word after the blank is obtained as shown in function block **2252** and the word is checked to determine if the word is an indicator as shown in function block **2254**. Then, at function block **2260**, the string is parsed to locate an indicator which is not at the end of the pattern and the next word after unnecessary white space such as that following a line feed or a carriage return is processed as shown in function block **2262** and the word is analyzed to determine if it is an indicator as shown in function block **2264**. Then, in function block **2270**, the temporary record is reset to the null set to prepare it for processing the next string and at function block **2280**, the meeting record is updated and at function block **2282** a check is performed to determine if an entry is already made to the meeting record before parsing the meeting record again.

#### Using the Identified Meeting Fields:

Now that we have identified fields within the meeting text which we consider important, there are quite a few things we can do with it. One of the most important applications of pattern matching is of course to improve the query we construct which eventually gets submitted to Alta Vista and News Page. There are also a lot of other options and enhancements which exploit the results of pattern matching that we can add to BF. These other options will be described in the next section. The goal of this section is to give the reader a good sense of how the results obtained from pattern matching can be used to help us obtain better search results.

Figure 23 shows a flowchart of the detailed processing for preparing a query and obtaining information from the Internet in accordance with an embodiment of the present invention. Processing commences at function block 2300 and immediately flows to function block 2310 to process the wrapper functionality to prepare for an

5 Internet search utilizing a web search engine. If the search is to utilize the Alta Vista search engine, then at function block 2330, the system takes information from the meeting record and forms a query in function blocks 2340 to 2360 for submittal to the search engine. If the search is to utilize the NewsPage search engine, then at

10 function block 2320, the system takes information from the meeting record and forms a query in function blocks 2321 to 2328.

#### Alta Vista Search Engine:

A strength of the Alta Vista search engine is that it provides enhanced flexibility. Using its advance query method, one can construct all sorts of Boolean queries and

15 rank the search however you want. However, one of the biggest drawbacks with Alta Vista is that it is not very good at handling a large query and is likely to give back irrelevant results. If we can identify the topic and the company within a meeting text, we can form a pretty short but comprehensive query which will hopefully yield better results. We also want to focus on the topics found. It may not

20 be of much merit to the user to find out info about a company especially if the user already knows the company well and has had numerous meetings with them. It's the topics they want to research on.

#### News Page Search Engine:

25 A strength of the News Page search engine is that it does a great job searching for the most recent news if you are able to give it a valid company name. Therefore when we submit a query to the news page web site, we send whatever company name we can identify and only if we cannot find one do we use the topics found to

form a query. If neither one is found, then no search is performed. The algorithm utilized to form the query to submit to Alta Vista is illustrated in Figure 25. The algorithm that we will use to form the query to submit to News Page is illustrated in Figure 26.

5

The following table describes in detail each function in accordance with an embodiment of the present invention. The order in which functions appear mimics the process flow as closely as possible. When there are situations in which a function is called several times, this function will be listed after the first function which calls it and its description is not duplicated after every subsequent function which calls it.

10

Main (BF.Main)	Public Sub	None	This is the main function where the program first launches. It initializes BF with the appropriate parameters(e.g. Internet time-out, stoplist...) and calls GoBF to launch the main part of the program.
ProcessCom mandLine (BF.Main)	Private Sub	Main	This function parses the command line. It assumes that the delimiter indicating the beginning of input from Munin is stored in the constant CMD_SEPARATOR.
CreateStopLi st (BF.Main)	Private Function	Main	This function sets up a stop list for future use to parse out unwanted words from the

09520578-030800



			meeting text. There are commas on each side of each word to enable straight checking.
CreatePatterns (BF.Pattern Match)	Public Sub	Main	<p>This procedure is called once when BF is first initialized to create all the potential patterns that portions of the meeting text can bind to. A pattern can contain however many elements as needed. There are two types of elements. The first type of elements are indicators. These are real words which delimit the potential of a meeting field (e.g. company) to follow. Most of these indicators are stop words as expected because stop words are words usually common to all meeting text so it makes sense they form patterns. The second type of elements are special strings which represent placeholders. A placeholder is always in the form of \$*\$ where * can</p>

09520578.030600

09520578.030000

			<p>be either PEOPLE, COMPANY, TOPIC_UPPER, TIME, LOCATION or TOPIC_ALL. A pattern can begin with either one of the two types of elements and can be however long, involving however any number/type of elements. This procedure dynamically creates a new pattern record for</p> <p>each pattern in the table and it also dynamically creates new tAPatternElements for each element within a pattern. In addition, there is the concept of being able to substitute indicators within a pattern. For example, the pattern \$PEOPLES of \$COMPANY\$ is similar to the pattern \$PEOPLES from \$COMPANY\$. "from" is a substitute for "of" . Our structure should be able to express such a need for substitution.</p>
GoBF	Public	Main	This is a wrapper proceduror

(BF.Main)	Sub		that calls both the parsing and the searching subroutines of the BF. It is also responsible for sending data back to Munin.
ParseMeetingText (BF.Parse)	Public Function	GoBackGroundFinder	<p>This function takes the initial meeting text and identifies the userID of the record as well as other parts of the meeting text including the title, body, participant list, location and time. In addition, we call a helper function ProcessStopList to eliminate all the unwanted words from the original meeting title and meeting body so that only keywords are left. The information parsed out is stored in the MeetingRecord structure. Note that this function does no error checking and for the most time assumes that the meeting text string is correctly formatted by Munin.</p> <p>The important variable is thisMeeting Record is the temp holder for all info</p>

			regarding current meeting. It's eventually returned to caller.
FormatDelimitation (BF.Parse)	Private	ParseMeetingText, DetermineNumWords, GetAWordFromString	There are 4 ways in which the delimiters can be placed. We take care of all these cases by reducing them down to Case 4 in which there are no delimiters around but only between fields in a string(e.g. A::B::C)
DetermineNumWords (BF.Parse)	Public Function	ParseMeetingText, ProcessStopList	This functions determines how many words there are in a string (stInEvalString) The function assumes that each word is separated by a designated separator as specified in stSeparator. The return type is an integer that indicates how many words have been found assuming each word in the string is separated by stSeparator. This function is always used along with GetAWordFromString and should be called before calling GetAWordFromString.

GetAWordFromString (BF.Parse)	Public Function	ParseMeetingText, ProcessStop List	This function extracts the ith word of the string(stInEvalString) assuming that each word in the string is separated by a designated separator contained in the variable stSeparator. In most cases, use this function with DetermineNumWords. The function returns the wanted word. This function checks to make sure that iInWordNum is within bounds so that i is not greater than the total number of words in string or less than/equal to zero. If it is out of bounds, we return empty string to indicate we can't get anything. We try to make sure this doesn't happen by calling DetermineNumWords first.
ParseAndCleanPhrase (BF.Parse)	Private Function	ParseMeetingText	This function first grabs the word and send it to CleanWord in order strip the stuff that nobody wants. There are things in

09520578-030600

			<p>parseWord that will kill the word, so we will need a method of looping through the body and rejecting words without killing the whole function</p> <p>i guess keep CleanWord and check a return value</p> <p>ok, now I have a word so I need to send it down the parse chain. This chain goes ParseCleanPhrase -&gt; CleanWord -&gt; EvaluateWord. If the word gets through the entire chain without being killed, it will be added at the end to our keyword string.</p> <p>first would be the function that checks for "/" as a delimiter and extracts the parts of that. This I will call "StitchFace" (Denise is more normal and calls it GetAWordFromString)</p> <p>if this finds words, then each of these will be sent, in turn, down the chain. If these get through the entire chain without being added or</p>
--	--	--	---

			killed then they will be added rather than tossed.
FindMin (BF.Parse)	Private Function	ParseAndCleanPhrase	This function takes in 6 input values and evaluates to see what the minimum non zero value is. It first creates an array as a holder so that we can sort the five input values in ascending order. Thus the minimum value will be the first non zero value element of the array. If we go through entire array without finding a non zero value, we know that there is an error and we exit the function.
CleanWord (BF.Parse)	Private Function	ParseAndCleanPhrase	This function tries to clean up a word in a meeting text. It first of all determines if the string is of a valid length. It then passes it through a series of tests to see it is clean and when needed, it will edit the word and strip unnecessary characters off of it. Such tests includes getting rid of file extensions, non chars, numbers etc.
EvaluateWord	Private	ParseAndCleanPhrase	This function tests to see if

d (BF.Parse)	Function	hrase	this word is in the stop list so it can determine whether to eliminate the word from the original meeting text. If a word is not in the stoplist, it should stay around as a keyword and this function exits beautifully with no errors. However, if the words is a stopword, an error must be returned. We must properly delimit the input test string so we don't accidentally retrieve sub strings.
GoPatternMatch (BF.Pattern Match)	Public Sub	GoBF	This procedure is called when our QueryMethod is set to complex query meaning we do want to do all the pattern matching stuff.It 's a simple wrapper function which initializes some arrays and then invokes pattern matching on the title and the body.
MatchPatterns (BF.Pattern Match)	Public Sub	GoPattern Match	This procedure loops through every pattern in the pattern table and tries to identify different fields within a meeting text specified by



			<p>sInEvalString. For debugging purposes it also tries to tabulate how many times a certain pattern was triggered and stores it in gTabulateMatches to see whichp pattern fired the most. gTabulateMatches is stored as a global because we want to be able to run a batch file of 40 or 50 test strings and still be able to know how often a pattern was triggered.</p>
MatchAPattern (BF.Pattern Match)	Private Function	MatchPatterns	<p>This function goes through each element in the current pattern. It first evaluates to determine whether element is a placeholder or an indicator. If it is a placeholder, then it will try to bind the placeholder with some value. If it is an indicator, then we try to locate it. There is a trick however. Depending on whether we are at current element is the head of the pattern or not we want to take different actions. If we are at the head, we want to look for the</p>

09520578-030000

			<p>indicator or the placeholder. If we can't find it, then we know that the current pattern doesn't exist and we quit. However, if it is not the head, then we continue looking, because there may still be a head somewhere. We retry in this case.</p>
<p>MatchMeetingField (BF.Pattern Match)</p>	<p>Private Function</p>	<p>MatchAPattern</p>	<p>This function uses a big switch statement to first determine what kind of placeholder we are talking about and depending on what type of placeholder, we have specific requirements and different binding criteria as specified in the subsequent functions called such as BindNames, BindTime etc. If binding is successful we add it to our guessing record.</p>
<p>BindNames (BF.Pattern Match)</p>	<p>Private Function</p>	<p>MatchMeetingField</p>	<p>In this function, we try to match names to the corresponding placeholder \$PEOPLE\$. Names are defined as any consecutive two words which are capitalized. We also what to</p>

			<p>retrieve a series of names which are connected by and , or &amp; so we look until we don't see any of these 3 separators anymore. Note that we don 't want to bind single word names because it is probably too general anyway so we don't want to produce broad but irrelevant results. This function calls BindAFullName which binds one name so in a since BindNames collects all the results from BindAFullName</p>
BindAFullName (BF.Pattern Match)	Private Function	BindNames	<p>This function tries to bind a full name. If the \$PEOPLES placeholder is not the head of the pattern, we know that it has to come right at the beginning of the test string because we've been deleting stuff off the head of the string all along.</p> <p>If it is the head, we search until we find something that looks like a full name. If we can't find it, then there's no such pattern in the text</p>

			entirely and we quit entirely from this pattern. This should eventually return us to the next pattern in MatchPatterns.
GetNextWordAfterWhiteSpace (BF.Pattern Match)	Private Function	BindAFullName, BindTime, BindCompanyTopicLoc	This function grabs the next word in a test string. It looks for the next word after white spaces, @ or /. The word is defined to end when we encounter another one of these white spaces or separators.
BindTime (BF.Pattern Match)	Private Function	MatchMeetingField	Get the immediate next word and see if it looks like a time pattern. If so we've found a time and so we want to add it to the record. We probably should add more time patterns. But people don't seem to like to enter the time in their titles these days especially since we now have tools like Outlook.
BindCompanyTopicLoc (BF.Pattern Match)	Private Function	MatchMeetingField	This function finds a continuous capitalized string and binds it to stMatch which is passed by reference from MatchMeetingField. A continuous capitalized string

			is a sequence of capitalized words which are not interrupted by things like , . etc. There's probably more stuff we can add to the list of interruptions.
LocatePatternHead (BF.Pattern Match)	Private Function	MatchAPattern	This function tries to locate an element which is an indicator. Note that this indicator SHOULD BE AT THE HEAD of the pattern otherwise it would have gone to the function LocateIndicator instead. Therefore, we keep on grabbing the next word until either there's no word for us to grab (quit) or if we find one of the indicators we are looking for.
ContainInArray (BF.Pattern Match)	Private Function	LocatePatternHead, LocateIndicator	' This function is really simple. It loops through all the elements in the array ' to find a matching string.
LocateIndicator (BF.Pattern Match)	Private Function	MatchAPattern	This function tries to locate an element which is an indicator. Note that this indicator is NOT at the head of the pattern otherwise it

			would have gone to LocatePatternHead instead. Because of this, if our pattern is to be satisfied, the next word we grab HAS to be the indicator or else we would have failed. Thus we only grab one word, test to see if it is a valid indicator and then return result.
InitializeGuessesRecord (BF.Pattern Match)	Private Sub	MatchAPattern	This function reinitializes our temporary test structure because we have already transferred the info to the permanent structure, we can reinitialize it so they each have one element
AddToMeetingRecord (BF.Pattern Match)	Private Sub	MatchAPattern	This function is only called when we know that the information stored in tInCurrGuesses is valid meaning that it represents legitimate guesses of meeting fields ready to be stored in the permanent record, tInMeetingRecord. We check to make sure that we do not store duplicates and we also what to clean up what we want to store so that

09520578-030800

			there's no cluttered crap such as punctuations, etc. The reason why we don't clean up until now is to save time. We don't waste resources calling ParseAndCleanPhrase until we know for sure that we are going to add it permanently.
NoDuplicateEntry (BF.Pattern Match)	Private Function	AddToMeetingRecord	This function loops through each element in the array to make sure that the test string aString is not the same as any of the strings already stored in the array. Slightly different from ContainInArray.
SearchAltaVista (BF.Search)	Public Function	GoBackGroundFinder	This function prepares a query to be submitted to AltaVista Search engine. It submits it and then parses the returning result in the appropriate format containing the title, URL and body/summary of each story retrieved. The number of stories retrieved is specified by the constant NUM_AV_STORIES. Important variables include

			stURLAltaVista used to store query to submit stResultHTML used to store html from page specified by stURLAltaVista.
ConstructAltaVistaURL (BF.Search)	Private Function	SearchAltaVista	This function constructs the URL string for the alta vista search engine using the advanced query search mode. It includes the keywords to be used, the language and how we want to rank the search. Depending on whether we want to use the results of our pattern matching unit, we construct our query differently.
ConstructSimpleKeyword (BF.Search)	Private Function	ConstructAltaVistaURL, ConstructNewsPageURL	This function marches down the list of keywords stored in the stTitleKW or stBodyKW fields of the input meeting record and links them up into one string with each keyword separated by a connector as determined by the input variable stInConnector. Returns this newly constructed string.
ConstructComplexAVKey	Private Function	ConstructAltaVistaURL	This function constructs the keywords to be send to the



yWord (BF.Search)			AltaVista site. Unlike ConstructSimpleKeyWord which simply takes all the keywords from the title to form the query, this function will look at the results of BF's pattern matching process and see if we are able to identify any specific company names or topics for constructing the queries. Query will include company and topic identified and default to simple query if we cannot identify either company or topic.
JoinWithConnectors (BF.Search)	Private Function	ConstructComplexAVKeyWord, ConstructComplexNPKeyWord, RefineWithRank	This function simply replaces the spaces between the words within the string with a connector which is specified by the input.
RefineWithData (NOT CALLED AT THE MOMENT)	Private Function	ConstructAltaVistaURL	This function constructs the date portion of the alta vista query and returns this portion of the URL as a string. It makes sure that alta vista

(BF.Search)			searches for articles within the past PAST_NDAYS.
RefineWithRank (BF.Search)	Private Function	ConstructAltaVistaURL	This function constructs the string needed to be passed to AltaVista in order to rank an advanced query search. If we are constructing the simple query we will take in all the keywords from the title. For the complex query, we will take in words from company and topic, much the same way we formed the query in ConstructComplexAVKeyword.
IdentifyBlock (BF.Parse)	Public Function	SearchAltaVista, SearchNewsPage	This function extracts the block within a string marked by the beginning and the ending tag given as inputs starting at a certain location(iStart). The block retrieved does not include the tags themselves. If the block cannot be identified with the specified delimiters, we return unsuccessful through the parameter iReturnSuccess passed to use by reference. The return type

			is the block retrieved.
IsOpenURL Error (BF.Error)	Public Function	SearchAltaVista, SearchNewsPage	This function determines whether the error encountered is that of a timeout error. It restores the mouse to default arrow and then returns true if it is a time out or false otherwise.
SearchNews Page (BF.Search)	Public Function	GoBackGroundF inder	This function prepares a query to be submitted to NewsPage Search engine. It submits it and then parses the returning result in the appropriate format containing the title, URL and body/summary of each story retrieved. The number of stories retrieved is specified by the constant UM_NP_STORIES
ConstructNewsPageURL (BF.Search)	Private Function	SearchNewsPage	This function constructs the URL to send to the NewsPage site. It uses the information contained in the input meeting record to

			determine what keywords to use. Also depending whether we want simple or complex query, we call different functions to form strings.
ConstructComplexNPKeyWord (BF.Search)	Private Function	ConstructNewsPageURL	This function constructs the keywords to be send to the NewsPage site. UnlikeConstructKeyWordString which simply takes all the keywords from the title to form the query, this function will look at the results of BF 's pattern matching process and see if we are able to identify any specific company names or topics for constructing the queries.
ConstructOverallResult (BF.Main)	Private Function	GoBackGroundFinder	This function takes in as input an array of strings (stInStories) and a MeetingRecord which stores the information for the current meeting. Each element in the array stores the stories retrieved from each information source. The function simply constructs the appropriate

			output to send to Munin including a return message type to let Munin know that it is the BF responding and also the original user_id and meeting title so Munin knows which meeting BF is talking about.
ConnectAndTransferToMunin (BF.Main)	Public Sub	GoBackGroundFinder	This function allows Background Finder to connect to Munin and eventually transport information to Munin. We will be using the UDP protocol instead of the TCP protocol so we have to set up the remote host and port correctly. We use a global string to store gResult Overall because although it is unnecessary with UDP, it is needed with TCP and if we ever switch back don't want to change code.
DisconnectFromMuninAndQuit (BF.Main)	Public Sub		

09520578-030800

Figure 24 shows a flowchart of the actual code utilized to prepare and submit searches to the Alta Vista and NewsPage search engines in accordance with an embodiment of the present invention. Processing commences at function block 2401 where a command line is utilized to update a calendar entry with specific calendar information. The message is next posted in accordance with function block 2402 and a meeting record is created to store the current meeting information in accordance with function block 2403. Then, in function block 2404 the query is submitted to the Alta Vista search engine and in function block 2405, the query is submitted to the NewsPage search engine. When a message is returned from the search engine, it is stored in a results data structure as shown in function block 2406 and the information is processed and stored in summary form in a file for use in preparation for the meeting as detailed in function block 2407.

Figure 25 provides more detail on creating the query in accordance with an embodiment of the present invention. Processing commences at function block 2505 where the meeting record is parsed to obtain potential companies, people, topics, location and a time. Then, in function block 2506, at least one topic is identified and in function block 2507, at least one company name is identified and finally in function block 2508, a decision is made on what material to transmit to the file for ultimate consumption by the user.

Figure 26 is a variation on the query theme presented in Figure 25. A meeting record is parsed in function block 2600, a company is identified in function block 2620, a topic is identified in function block 2630 and finally in function block 2640 the topic and or the company is utilized in formulating the query.

While various embodiments have been described above, it should be understood that they have been presented by way of example only, and not limitation. Thus, the breadth and scope of a preferred embodiment should not be limited by any of the

above described exemplary embodiments, but should be defined only in accordance with the following claims and their equivalents.

09520573.030800

What is claimed is:

1. A method for a knowledgebase framework, comprising the steps of:
- (a) obtaining information from at least one source utilizing a network;
- (b) generating an index for the obtained information, wherein the generated index comprises a plurality of items each associated with at least some of the obtained information;
- (c) displaying the index to a user utilizing the network;
- (d) permitting the user to select at least one of the items of the index; and
- (e) displaying the information associated with the selected item to the user utilizing the network.
2. A method as recited in claim 1, wherein the at least one source comprises an internal source.
3. A method as recited in claim 1, wherein the at least one source comprises an external source accessible utilizing a wide area network.
4. A method as recited in claim 1, wherein the information obtained from the sources includes pharmaceutical information.
5. A method as recited in claim 1, further comprising the steps of monitoring at least one of the sources utilizing the network for updated information relating to at least one of the items of the index, generating a notice regarding the updated information, and transmitting the notice to the user utilizing the network.
6. A method as recited in claim 5, wherein the user selects the at least one source to be monitored.



1 7. A method as recited in claim 1, further comprising the steps of permitting the  
2 user to input a search term utilizing the network, searching the index for  
3 items associated with the search term, and displaying items of the index  
4 associated with the search term to the user utilizing the network.

1 8. A method as recited in claim 1, wherein displaying the information  
2 associated with the selected item or entry to the user includes utilizing the  
3 network to retrieve the associated information from the source from which  
4 the associated information was obtained.

1 9. A method as recited in claim 1, wherein the network is capable of  
2 communicating using TCP/IP protocol.

1 10. A computer program embodied on a computer readable medium for a  
2 knowledgebase framework, comprising:  
3 (a) a code segment that obtains information from at least one source utilizing a  
4 network;  
5 (b) a code segment that generates an index for the obtained information, wherein  
6 the generated index comprises a plurality of items each associated with at  
7 least some of the obtained information;  
8 (c) a code segment that displays the index to a user utilizing the network;  
9 (d) a code segment that permits the user to select an least one of the items of the  
10 index; and  
11 (e) a code segment that displays the information associated with the selected  
12 item to the user utilizing the network.

1 11. A computer program as recited in claim 10, wherein the at least one source  
2 comprises an internal source.

09520578.030000

- 1 12. A computer program as recited in claim 10, wherein the at least one source  
2 comprises an external source accessible utilizing a wide area network.
- 1 13. A computer program as recited in claim 10, wherein the information  
2 obtained from the sources includes pharmaceutical information.
- 1 14. A computer program as recited in claim 10, further comprising a code  
2 segment that monitors at least one of the sources utilizing the network for  
3 updated information relating to at least one of the items of the index, a code  
4 segment that generates a notice regarding the updated information, and a  
5 code segment that transmits the notice to the user utilizing the network.
- 1 15. A computer program as recited in claim 14, wherein the user selects the at  
2 least one source to be monitored.
- 1 16. A computer program as recited in claim 10, further comprising a code  
2 segment that permits the user to input a search term utilizing the network, a  
3 code segment that searches the index for items associated with the search  
4 term, and a code segment that displays items of the index associated with the  
5 search term to the user utilizing the network.
- 1 17. A computer program as recited in claim 10, wherein displaying the  
2 information associated with the selected item or entry to the user includes  
3 utilizing the network to retrieve the associated information from the source  
4 from which the associated information was obtained.
- 1 18. A computer program as recited in claim 10, wherein the network is capable  
2 of communicating using TCP/IP protocol.
- 1 19. A system for a knowledgebase framework, comprising:

00000-8250256

- 2 (a) logic that obtains information from at least one source utilizing a network;
- 3 (b) logic that generates an index for the obtained information, wherein the
- 4 generated index comprises a plurality of items each associated with at least
- 5 some of the obtained information;
- 6 (c) logic that displays the index to a user utilizing the network;
- 7 (d) logic that permits the user to select an least one of the items of the index; and
- 8 (e) logic that displays the information associated with the selected item to the
- 9 user utilizing the network.

- 1 20. A system as recited in claim 19, further comprising logic that monitors at
- 2 least one of the sources utilizing the network for updated information relating
- 3 to at least one of the items of the index, logic that generates a notice
- 4 regarding the updated information, and logic that transmits the notice to the
- 5 user utilizing the network.

09520578.030800

## ABSTRACT

A system, method and article of manufacture are provided for a knowledgebase framework. Information is obtained from at least one source utilizing a network. Utilizing a knowledge model, an index is generated for the obtained information. The generated index includes a plurality of items each associated with at least some of the obtained information. Utilizing the network, the generated index is displayed to a user. The user is permitted to select an least one of the items of the index. The information associated with the selected item is then displayed to the user utilizing the network.

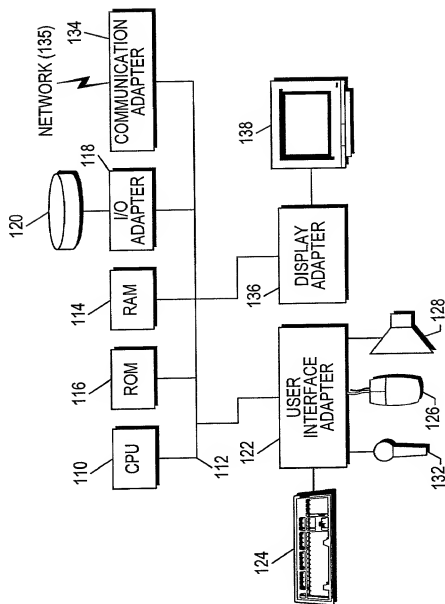


FIG. 1

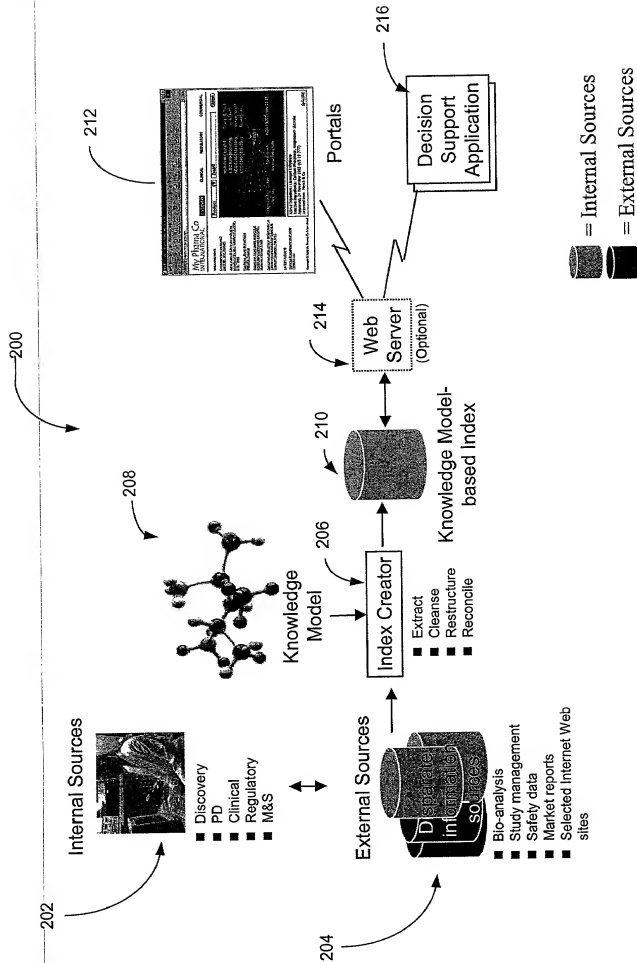


FIG. 2


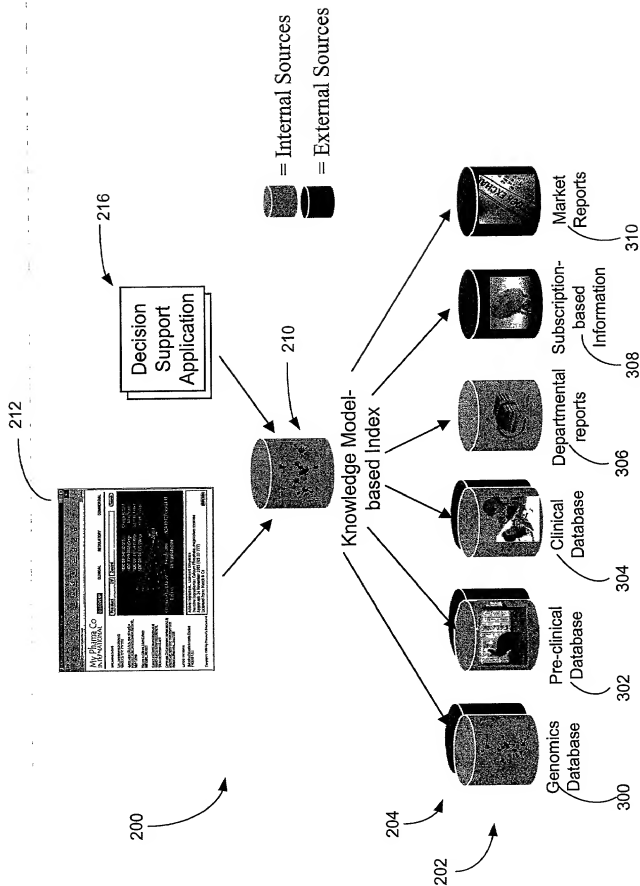


FIG. 3




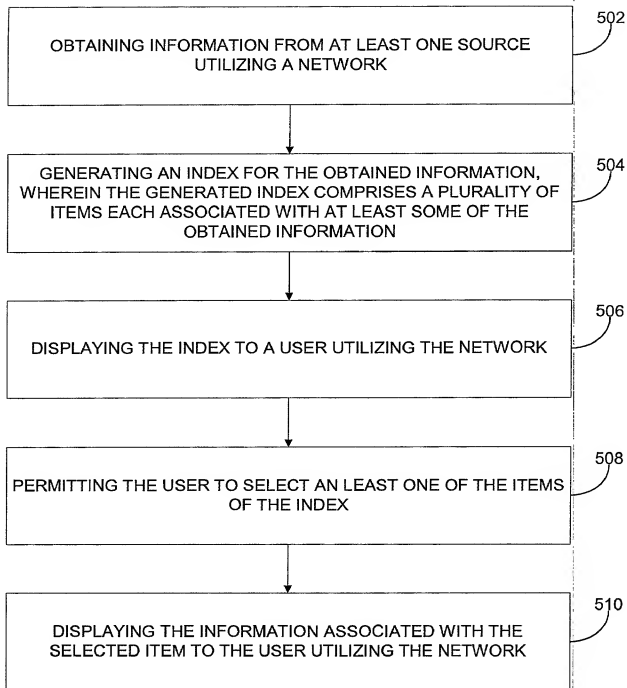

500

**FIG. 5**

600

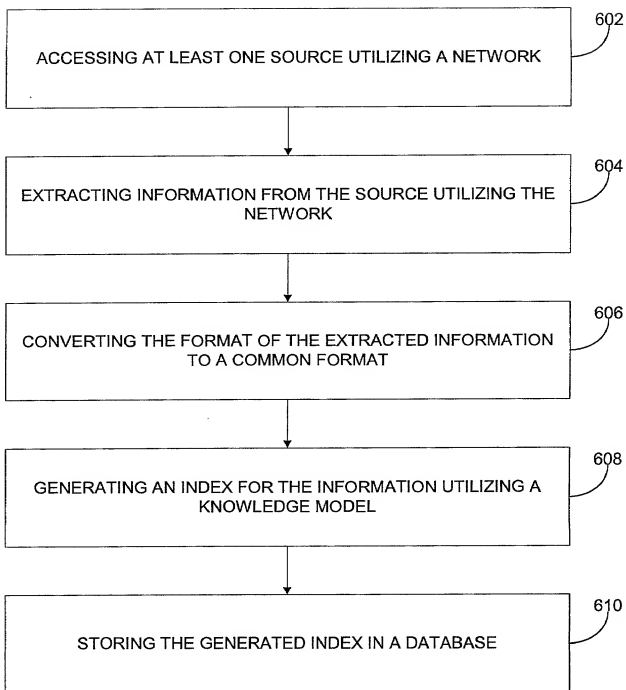

**FIG. 6**



Acme Pharmaceuticals

# KDISCOVERER

700

User Name :  702  
Password :  704

☒ Remember my user name and password

706

Login

New User

If you forget your password, please call 1-800-PASSWORD.

**Acme Pharmaceuticals** **KDISCOVERER - Welcome!**

Recent News | Organizer | Research | Development | Commercialization | Search & Browse | Therapeutic Area

Therapeutic Area

- Cardiology/Vascular Diseases\*
- Dental/Maxillofacial Surgery
- Dermatology/Plastic Surgery
- Endocrinology
- Gastroenterology
- Hematology
- Immunology/Infectious Dis...
- Musculoskeletal
- Nephrology/Urology
- Neurology\*
- Obstetrics/Gynecology
- Oncology\*
- Ophthalmology
- Otolaryngology
- Pediatrics/Nematology
- Pharmacology/Toxicology
- Psychiatry/Psychology
- Pulmonary/Respiratory Di...
- Rheumatology
- Trauma/Emergency Medicine

Therapeutic Area : Cardiology/Vascular Diseases

Quick Search and Browse

Search

Help

Copyright (c) 1999 - Andasen Consulting LLP.

FIG. 8

Acme Pharmaceuticals

**KDISCOVERER - Welcome!**

Recent Items | Organizer | Research | Development | Commercialization | Search & Browse

Edit Profile | Sitemap | Logout

Target

Cardiology

Acute Myocardial Infarction

Angina Pectoris

Chronic Occlusive Arterial...

Cardiology/Vascular Diseases\*

5-AMP Deaminase

ACE (Angiotensin-converting Enzyme)\* protein-gated K...

Angiotensin Receptor\*

Antiarrhythmics

Arterolar

Bronchodilator Agent

Calcium Channel

Coronary

Digitalis Glycosides

Epithelial Sodium Channel\*

Ganglionic Blocker

Inotropic Drug

Miscellaneous

Non-Radiopaque Agent

Peripheral

Radiopaque Agent

Selective C-Gmp. Phosphod...

Sympatholytic

Vasodilator

Venotonics/Vasculoprotec...

Venosclerosing Agent

Veratrum Alkaloids

Xanthines

Therapeutic Area : Cardiology/Vascular Diseases

Therapeutic Area

Card

Quick Search and Browse

Search Help

904

902

STRAIN<sup>®</sup>  
For evaluation use only

FIG. 9

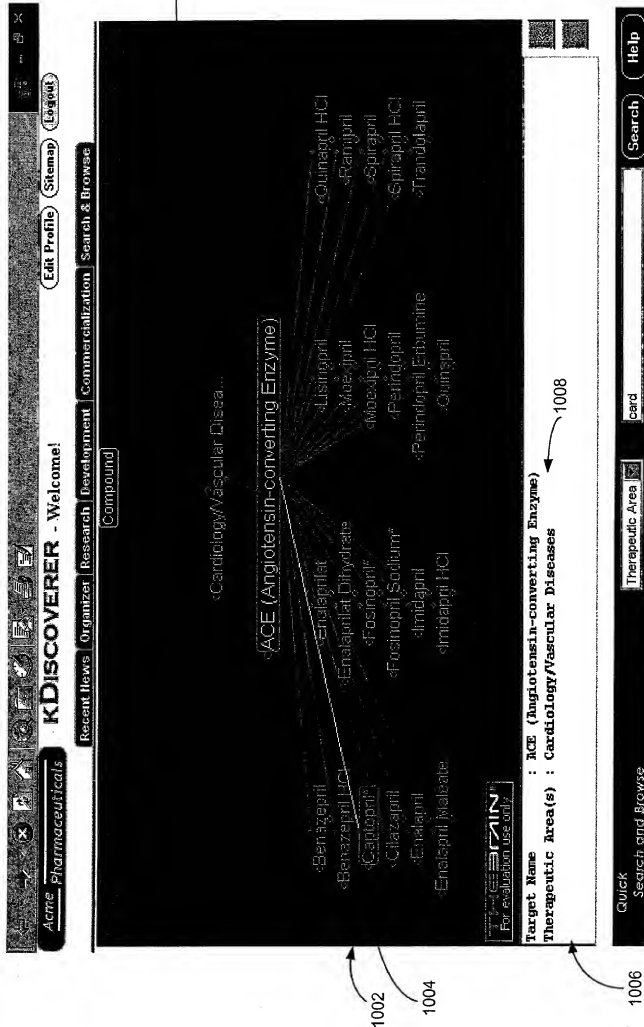
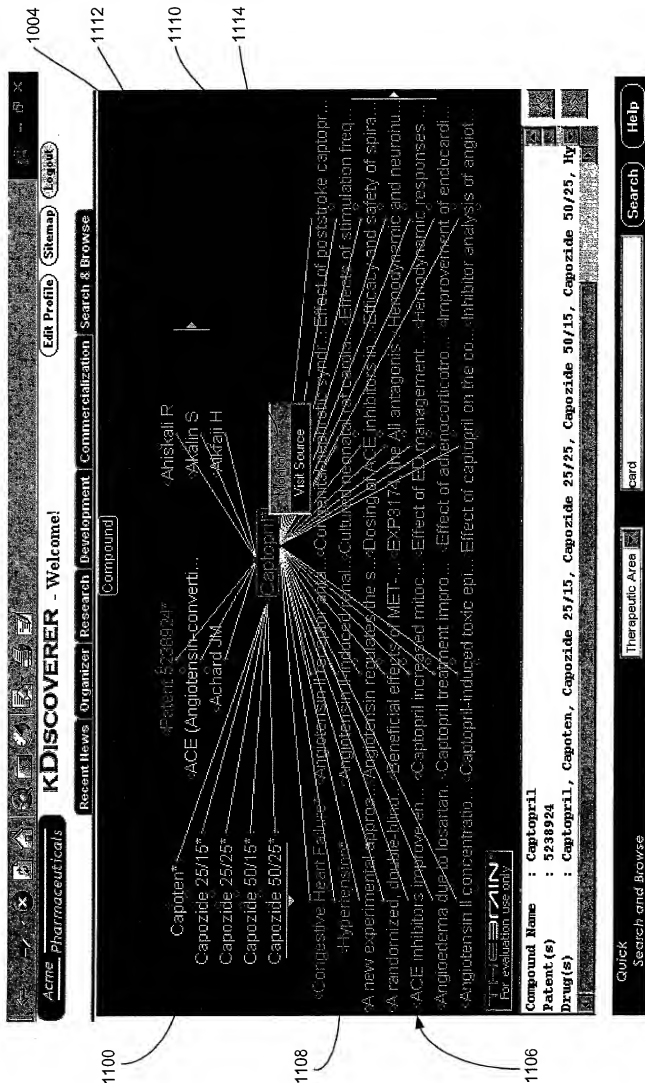


FIG. 10



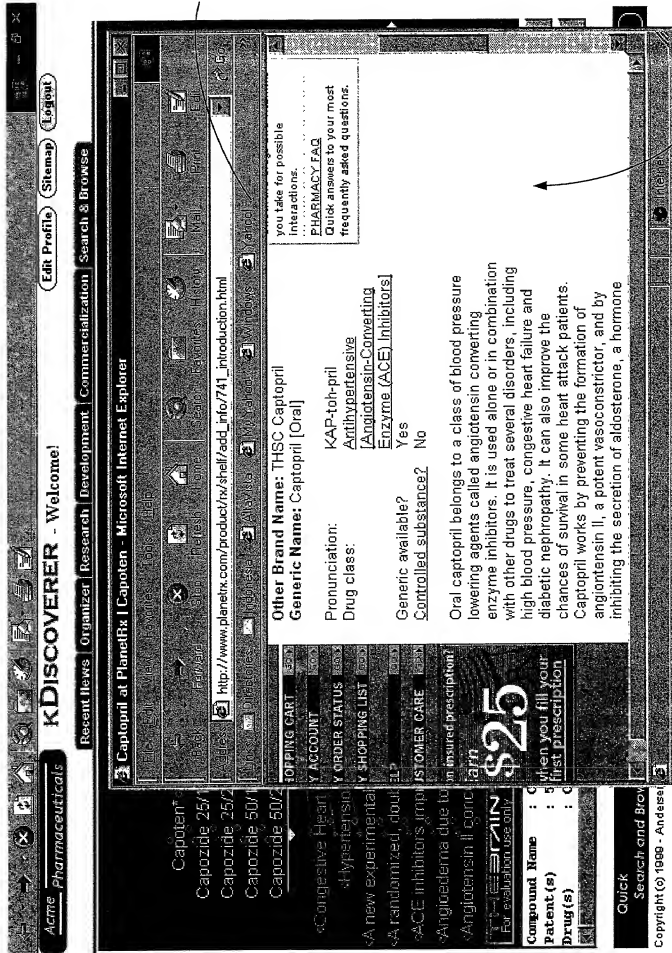


FIG. 12



008060\*87502560

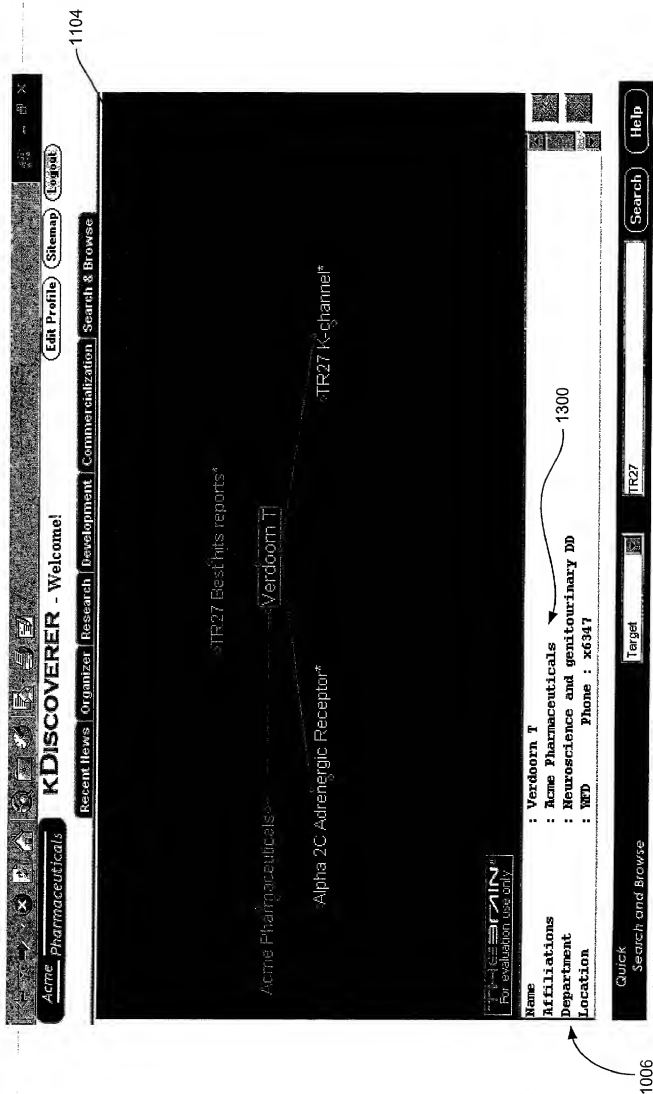


FIG. 13

0080ED\*07502560

1402

1404

Acme Pharmaceuticals

**KDISCOVERER - Welcome!**

Recent News Organizer Research Development Commercialization Search & Browse

Edit Profile Sitemap Logout

1406

Patent

Patent 47881244  
Patent 51844072  
Patent 50322486  
Patent 57834154  
Patent 5942519

Bristol Myers Squibb  
Merck

Patent 5238924

Caplypt®

FDA 18343  
Smith Ronald D.

Abstract  
Visit Source

1400

1116

Patent Number : 5238924  
Exp. Date : AUG 24, 2010  
Assignee : Merck

1114

1004

Quick Search and Browse

Therapeutic Area

Search

Help

Copyright (c) 1999 - Andersen Consulting LLP.

FIG. 14

0080ED\*87502560


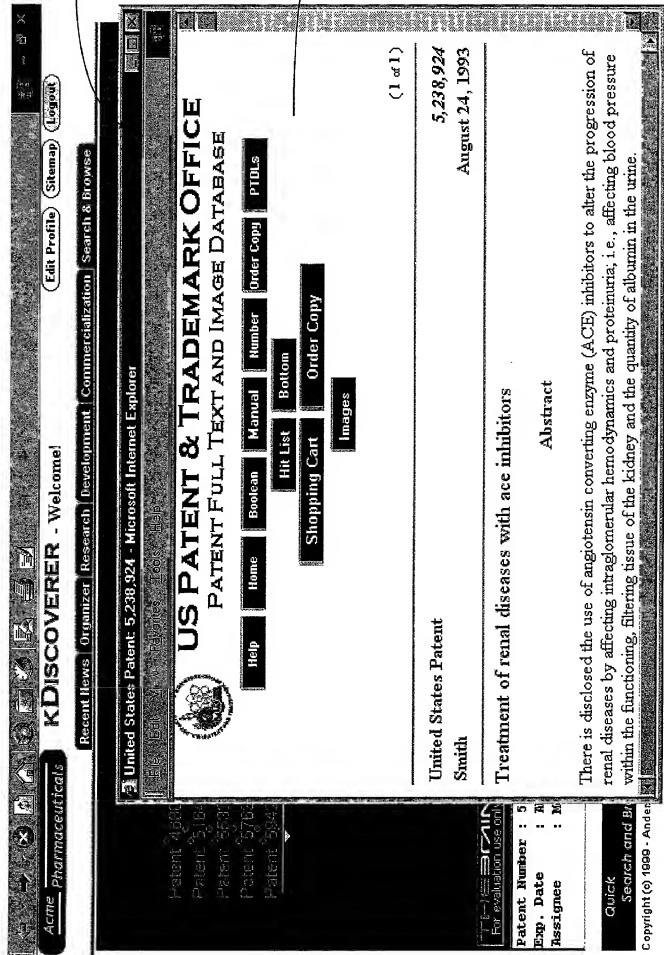


FIG. 15



00000-87502660

1700

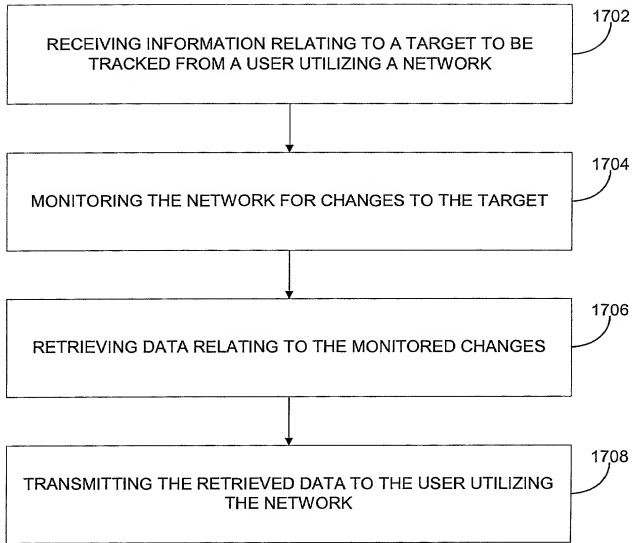

**FIG. 17**

008020"8/502560

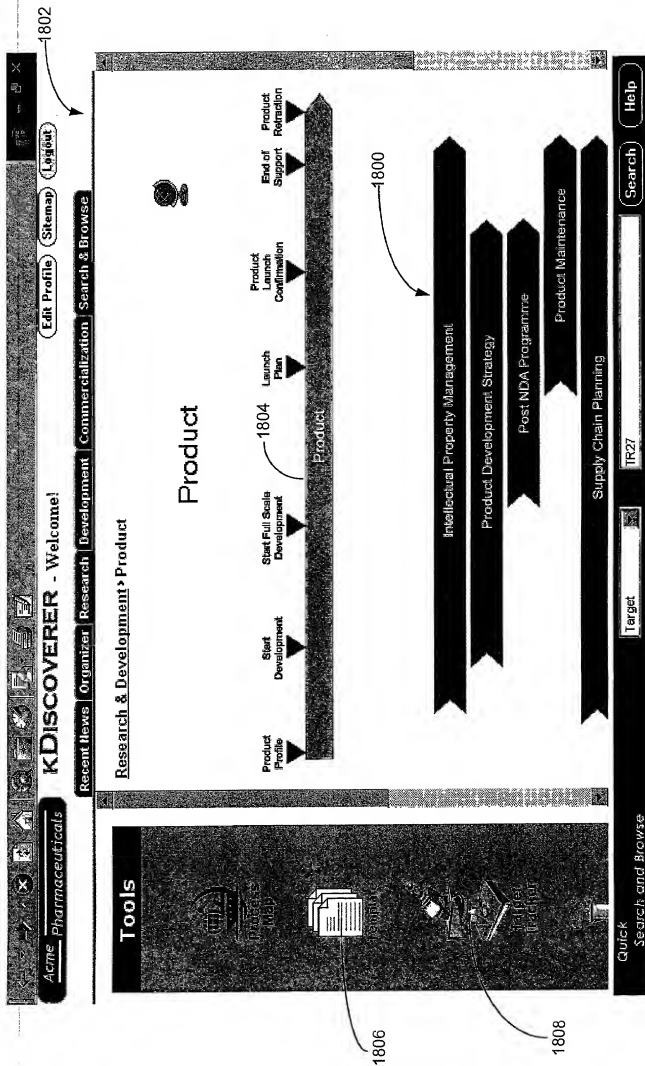


FIG. 18A

Quick  
Search and Browse

Copyright (c) 1999 - Andersen Consulting LLP.

0080EO-87502560

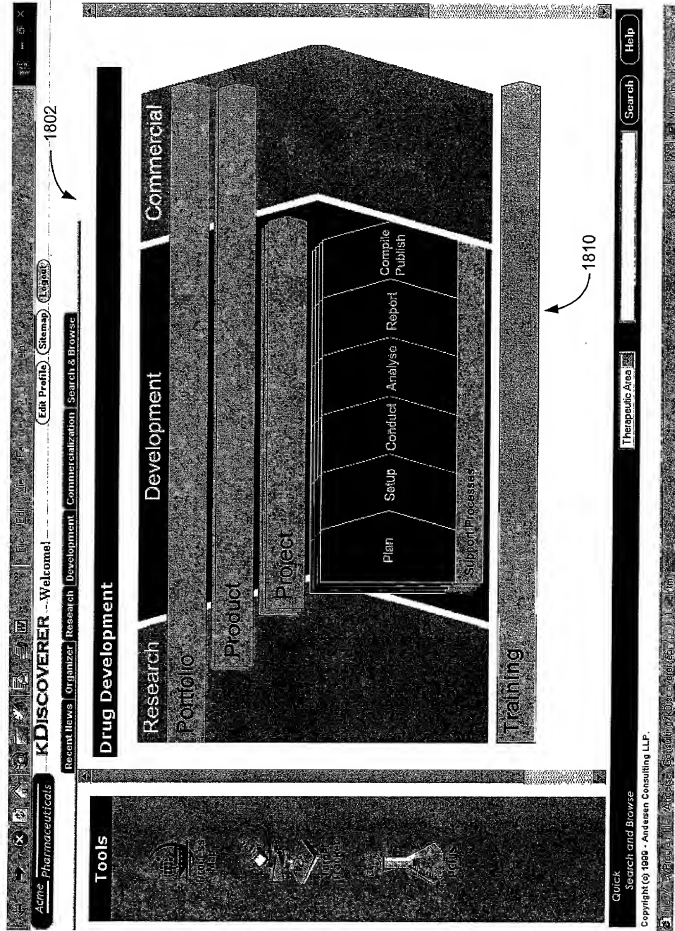


FIG. 18B

**KDISCOVERER - Welcome!**

Recent News | Organizer | Research | Development | Commercialization | Search & Browse | Edit Profile | Sitemap | Logout

### Mail - In Box

Who	Date	Subject
<input type="checkbox"/> George Mason	10/19/99	JAMA article due in two weeks!
<input type="checkbox"/> Norma McKay	10/30/99	Thank you
<input type="checkbox"/> Ian Sikotsky	11/08/99	Results of assay ENS-3473819

1820

Compound  
 Disease  
 Drug  
 FDA Approval  
 Literature  
 Patent  
 Organization  
 Organism  
 Target

Therapeutic Areas

Quick Search and Browse

Copyright © 1999 - Acme Consulting LLP.


FIG. 18C





FIG. 19

1900

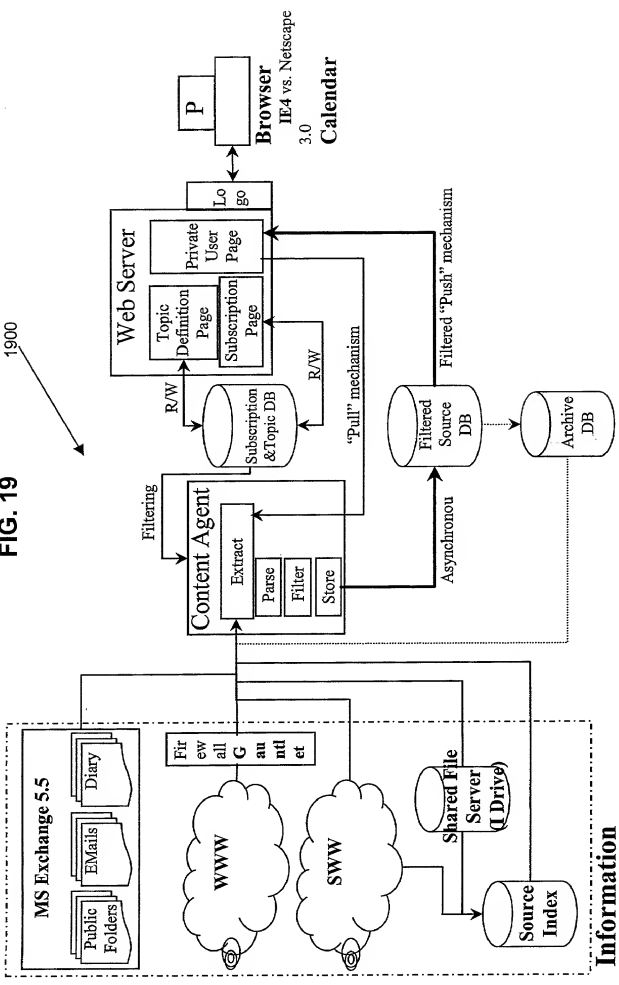

IE4 vs. Netscape  
3.0  
Calendar

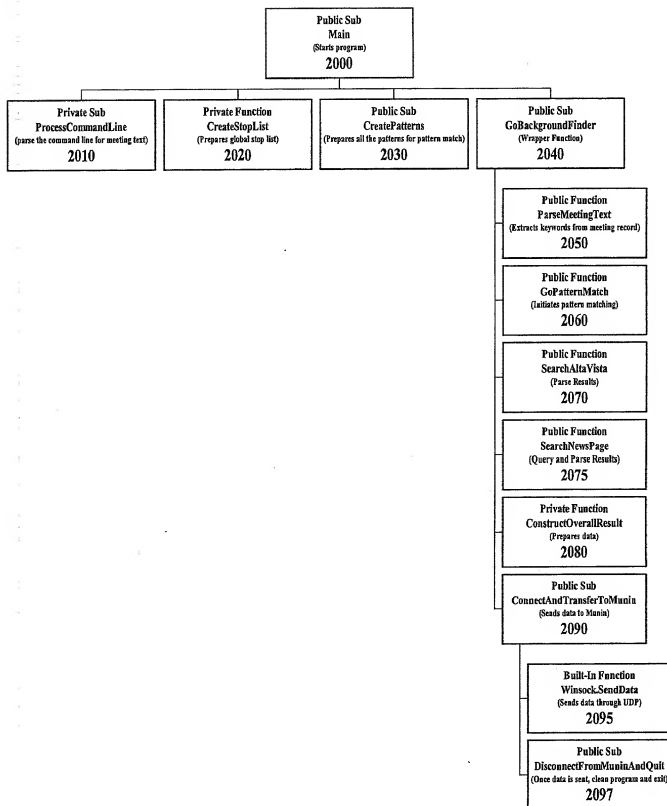


FIG. 20

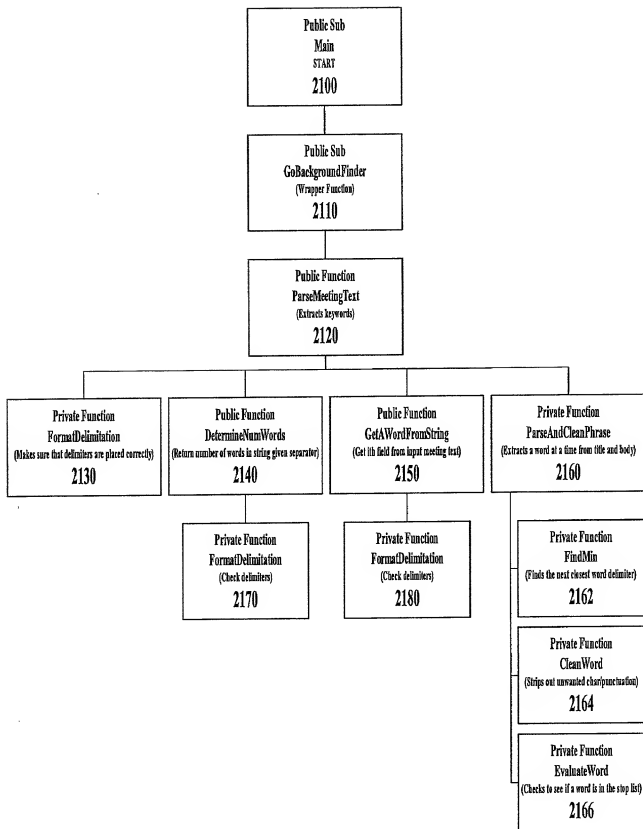


FIG. 21

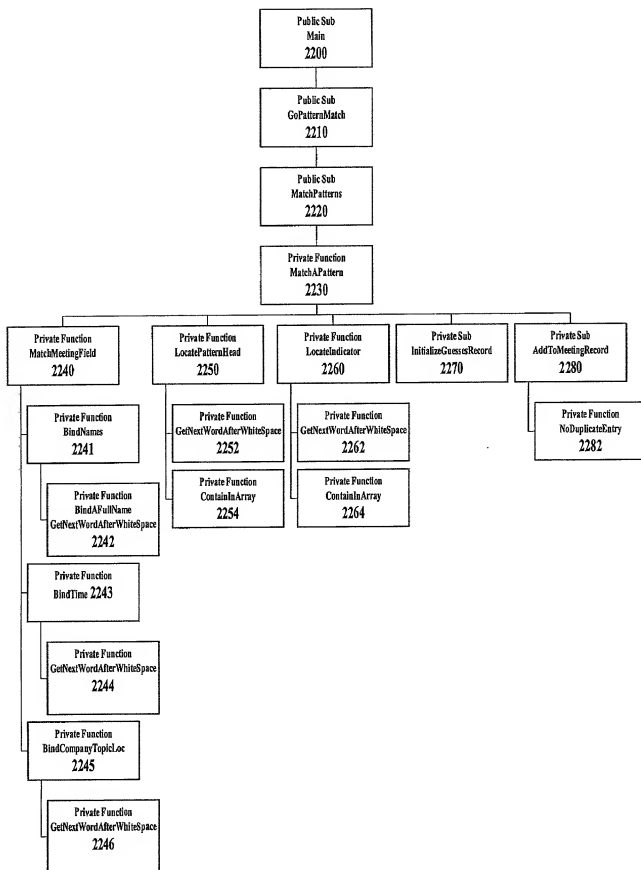
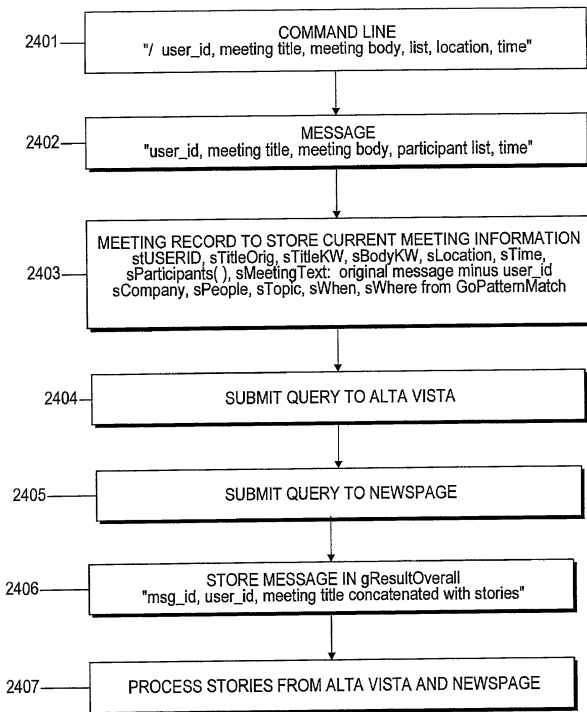



FIG. 22

```

graph TD
    2300["Public Sub  
Main  
2300"] --> 2310["Public Sub  
GoBackgroundFinder  
(Wrapper Function)  
2310"]
    2310 --> 2330["Public Function  
SearchAltaVista  
2330"]
    2310 --> 2320["Public Function  
SearchNewsPage  
2320"]
    2330 --> 2340["Private Function  
ConstructAltaVistaURL  
2340"]
    2330 --> 2350["Public Function  
IdentifyBlock  
2350"]
    2330 --> 2360["Public Function  
IsOpenURLError  
2360"]
    2320 --> 2321["Private Function  
ConstructNewsPageURL  
2321"]
    2320 --> 2322["Private Function  
ConstructSimpleKeyWord  
2322"]
    2320 --> 2324["Private Function  
ConstructComplexNPKeyWord  
2324"]
    2320 --> 2326["Private Function  
JoinWithConnectors  
2326"]
    2320 --> 2327["Public Function  
IdentifyBlock  
2327"]
    2320 --> 2328["Public Function  
IsOpenURLError  
2328"]
    2340 --> 2342["Private Function  
ConstructSimpleKeyWord  
2342"]
    2340 --> 2344["Private Function  
ConstructComplexAVKeyWord  
2344"]
    2340 --> 2345["Private Function  
JoinWithConnectors  
2345"]
    2340 --> 2346["Private Function  
RefineWithRank  
2346"]
    2340 --> 2348["Private Function  
JoinWithConnectors  
2348"]
    2340 --> 2349["Private Function  
RefineWithDate  
2349"]
  
```


FIG. 23

**FIG. 24**

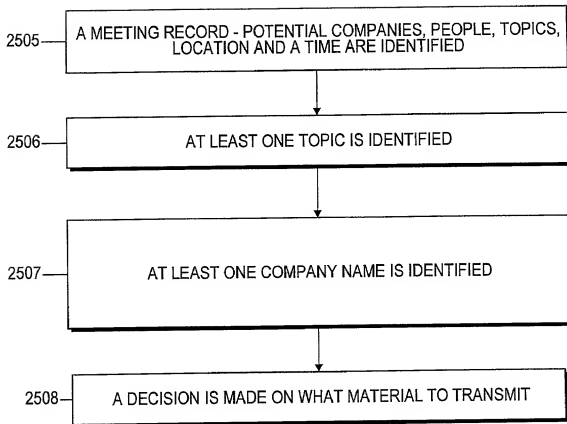

**FIG. 25**



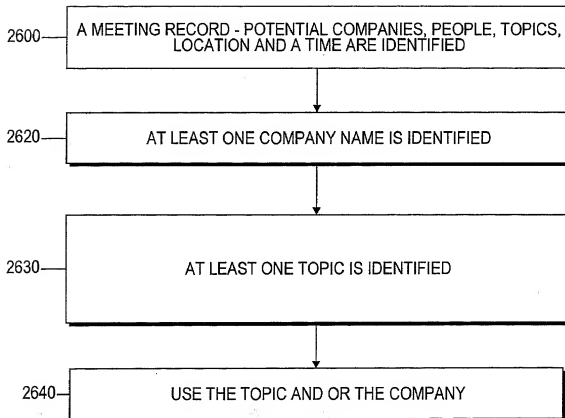

**FIGURE 26**